

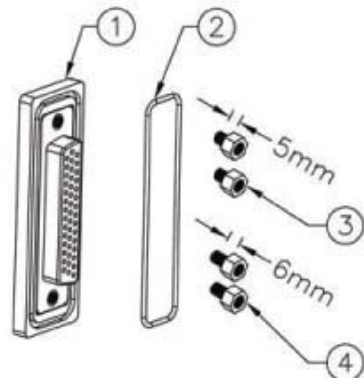
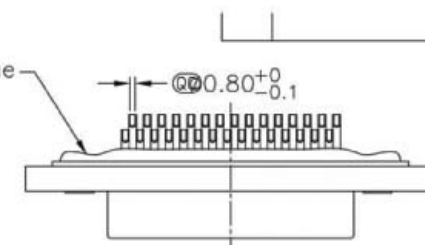
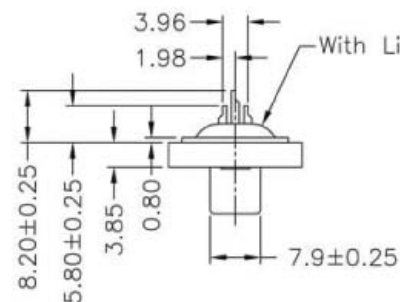


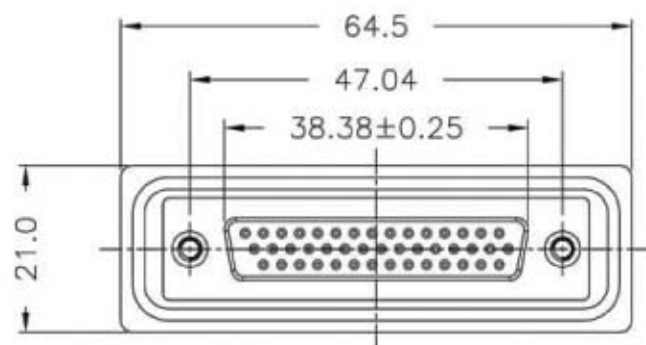

Screw L=5.0 For Panel Thickness
Under 1.2mm


Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm

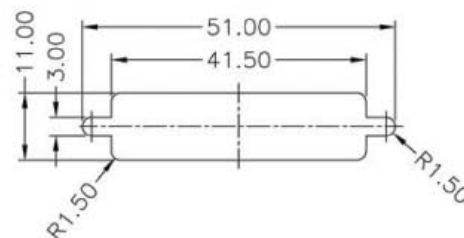

Recommended Panel Cut-Out

Material:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Applicable Wire Range: 24AWG-28AWG



RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	11.28.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-HDF44LL-WP-R

Title	D-Sub, High Density, Female, 44 Pin, Solder Cup
--------------	--

Drawing No.

rev00

Replace

Sheet
