

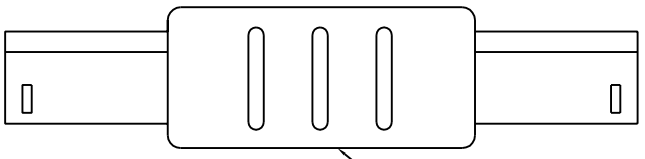
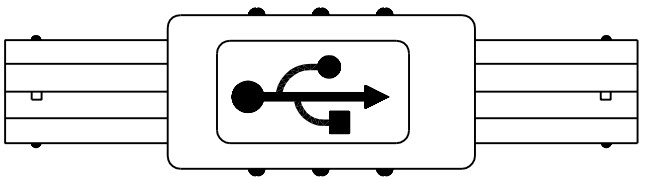


A B C D E F

DATE	BY	REVISION



INSULATOR MATERIAL  
 :PBT, UL 94V-0  
 CONTACT MATERIAL  
 :Brass, Gold Plated Over Nickel

SHELL FINISH  
 :Nickel Silver  
 OVERMOLD MATERIAL  
 :PVC

CURRENT RATING  
 :0.5mA

DIELECTRIC STRENGTH  
 :1000V AC for one minute  
 INSULATOR RESISTANCE  
 :1000MΩ min at 500V DC

CONFIGURATION:  
 B MALE B MALE

- 1 \_\_\_\_\_ 1
- 2 \_\_\_\_\_ 2
- 3 \_\_\_\_\_ 3
- 4 \_\_\_\_\_ 4
- G \_\_\_\_\_ G

1 2 3 4

1 2 3 4

DATE	17 JAN,2003	PARTS NO	
UNIT	MM	DRAWN NO	A-USB-6
SCALE		BUYER NO	002

TITLE:  
 ADAPTER  
 USB B MALE/MALE  
 A-USB-6

DRAWN	Y.C.C	CHECK	APPRO
	1/17		
ASSMANN ELECTRONICS.INC			