


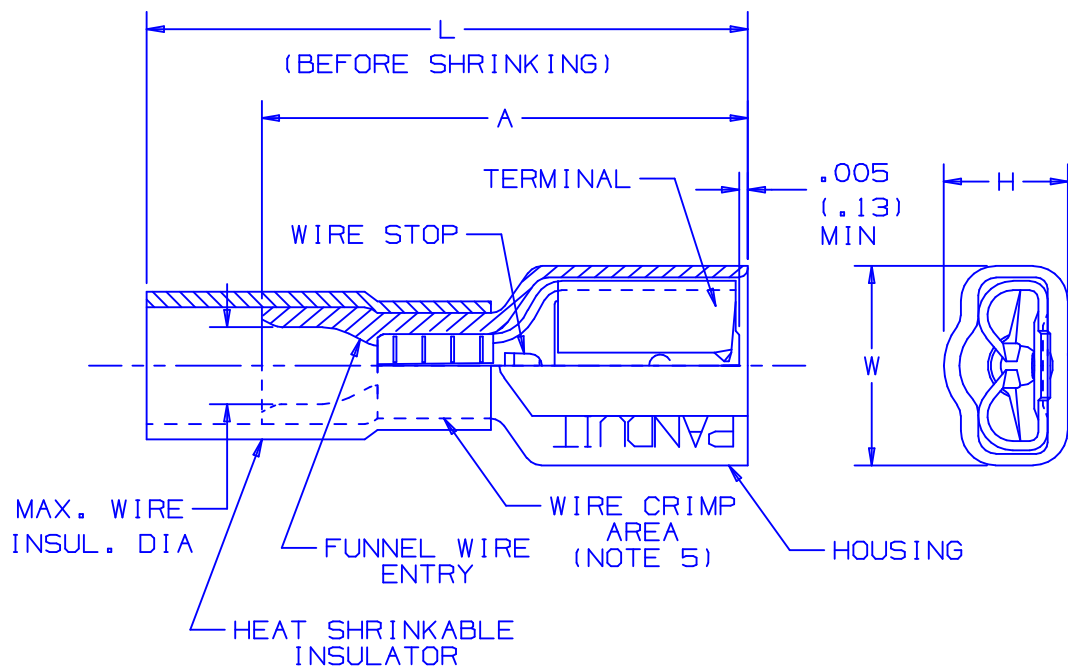

NOTES:

- FOR USE WITH STRANDED COPPER WIRE ONLY
(SEE TABLE FOR WIRE RANGE)
- MATERIAL:
A. TERMINAL - CDA 260 BRASS, TIN PLATED
B. HOUSING - TYPE 66 NYLON
C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
- MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
- ALL DIMENSIONS SHOWN ARE NOMINAL.
DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
- PART NUMBER DNH10-250FI IS CONSTRUCTED WITH A BRASS SLEEVE IN WIRE CRIMP AREA.
- INSTALLATION TOOL: CT-310
- PKG. QTY. : STD. PKG. -Q=25
-E=20
BULK PKG. -D=500
-T=200

PART NUMBER		TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA	DIMENSIONS				STRIP LENGTH
						A	W	H	L	
DNH18-250FI B	-Q -D	.250 X .032 (6.3 X 0.8)	22-18	RED	.132 (3.35)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH14-250FI B	-Q -D	.250 X .032 (6.3 X 0.8)	16-14	BLUE	.156 (3.96)	.84 (21.3)	.35 (8.9)	.22 (5.5)	1.44 (36.6)	9/32 (7.1)
DNH10-250FI	-E -T	.250 X .032 (6.3 X 0.8)	12-10	YELLOW	.230 (5.84)	.96 (24.4)	.35 (8.9)	.27 (6.9)	1.44 (36.6)	3/8 (9.5)

A41458_05

05	7/03	KL FU		ADDED INTERNAL SERRATIONS				 TINLEY PARK, ILLINOIS
04	4/01	SAB	SKB	ADDED PACKAGING CODES AND NOTE 7	09325	JAC	TRO	
03	1/01	RM		FILESPEC WAS N41458AA_PCD_02	08933			
02	5-95	MS		UPDATED NOTES AND DIMENSIONS	03331			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DRL CHK'D SCALE NONE DRAWING NO. A41458

HEAT SHRINK FULLY INSULATED
FEMALE DISCONNECTS