
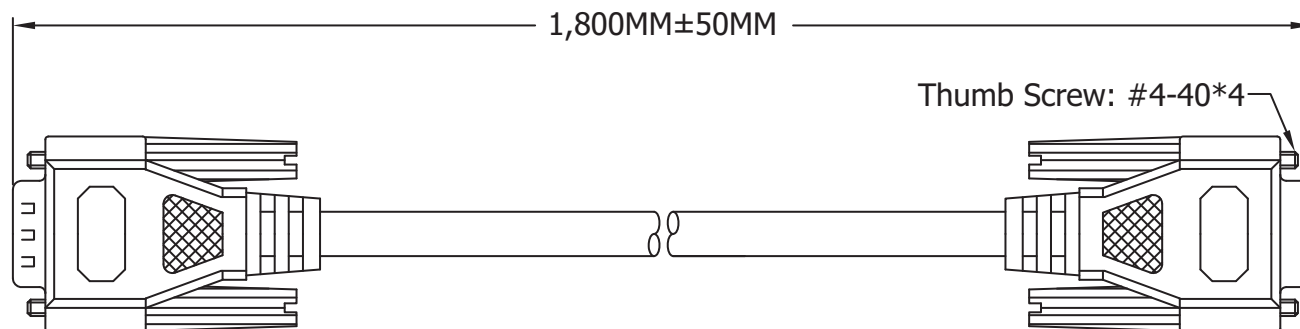



HDB 15 Male
Plastic: Blue

P1



HDB 15 Female
Plastic: Blue

P2



PIN OUT

P1	P2	P1	P2
1	1	10	ORANGE 10
6	6	11	WHITE 11
2	2	12	YELLOW 12
7	7	13	GREEN 13
3	3	14	RED 14
8	8	SHELL	BRAID SHELL
4	4	CENTER	
5	5	SHIELDING	

Material:

- CABLE: 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL
INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
- CONNECTOR:
P1:HDB 15P MALE,THE 9TH PIN IS EMPTY,GOLD FLASH CONTACT,
NICKEL PLATED SHELL
P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
- SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN BLISTER)

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

AK3220X-R

TITLE

Premium XGA Monitor Extension Cable -
HD D-Sub 15-pin Male <=> Female, 1.8 Meters

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved