
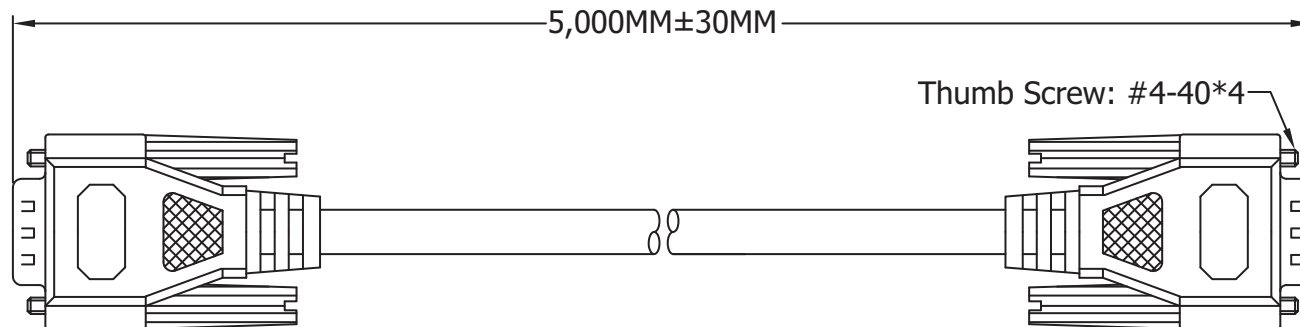



HDB 15 Male
Plastic: Blue

P1



HDB 15 Male
Plastic: Blue


P2



Material:

- 1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+ INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE OD:Ø8.1± 0.15mm UL-2919
- 2.CONNECTOR:
P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL (9TH PIN UNLOAD)
- 3.SHIELD:COPPER-FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 5.ELECTRONIC TEST:
 - <1>.100% OPEN SHORT & MIS WIRE TEST
 - <2>.CONTACT RESISTANCE 3 OHMS MAX.
 - <3>.INSULATION RESISTANCE 1M OHMS MIN/ DC 5V
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

PIN OUT

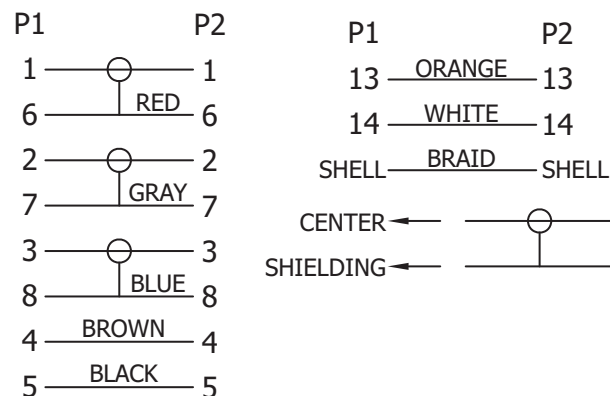

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

AK3770-5-R

TITLE Premium VGA Monitor connection cable -
HD D-Sub 15-pin Male <=> Male, 5 Meters

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved