
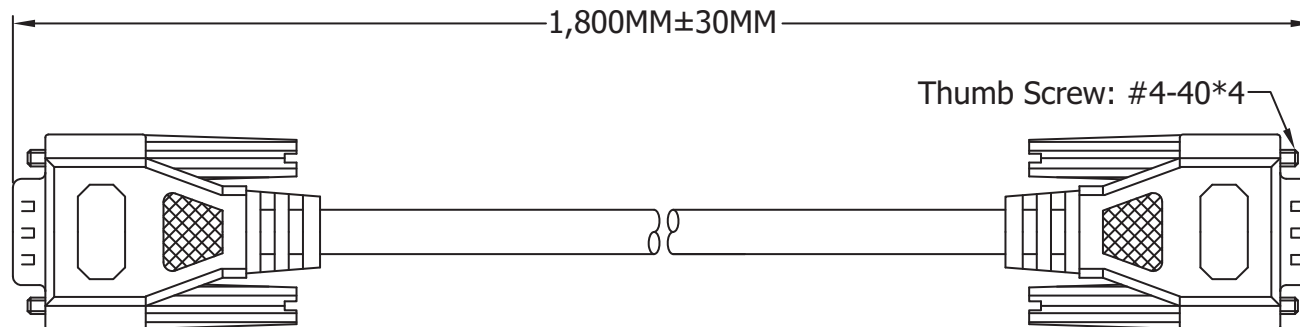



HDB 15 Male  
Plastic: Blue

**P1**



HDB 15 Male  
Plastic: Blue

**P2**



### Material:

1.CABLE:28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER  
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*4C+  
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN  
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
COLOR:BEIGE OD:Ø8.1± 0.15mm UL-2919

### 2.CONNECTOR:

P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL  
(9TH PIN UNLOAD)

3.SHIELD:COPPER-FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID


4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.

### 5.ELECTRONIC TEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX.
- <3>.INSULATION RESISTANCE 1M OHMS MIN/ DC 5V

6.PACKING:SEE P-0039 REV.C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN PACKING)  
PACKING TYPE: DB VP4.

### PIN OUT

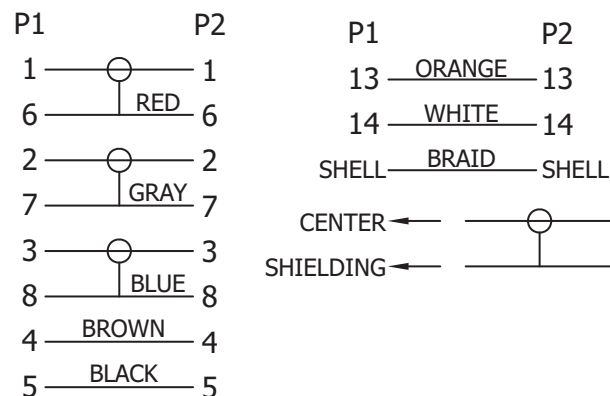

Ⓜ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**AK5320-1.8-R**

TITLE Premium VGA Monitor connection cable -  
HD D-Sub 15-pin Male <=> Male, 1.8 Meters

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved