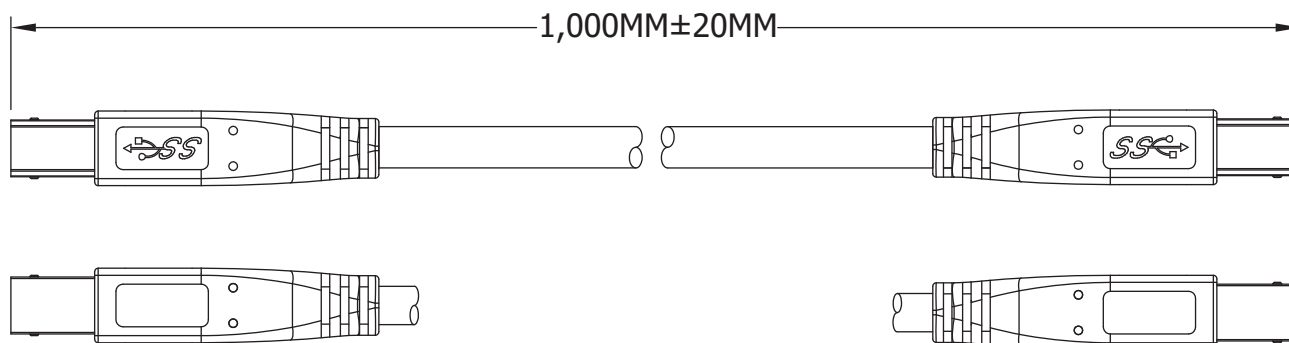



Material:

- Cable: UL-27725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7.0127 T.C.)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin +AL/MY +B.D(85%)

- PVC Jacket
- OD: 5.2±0.15MM
- Color: Black
- P1 & P2 Connectors: USB 3.0 Type Male 9 Pin
- Contact: 30μ"
- Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

Electrical:

- 100% Open short & mis wire test
Contact Resistance: 3Ω Max.
Insulation Resistance: 10Ω Min.
- Hi-Pot 300V DC

Unit: MM

PIN OUT		
P1	RED	P2
1		1 PWR
2	WHITE	2 UTP_D-
3	GREEN	3 UTP_D+
4	BLACK	4 GND_PWRrt
5	BLUE	5 SDP1-
6	YELLOW	6 SDP1+
7	D.W	7 SDP1_Drain & SDP2_Drain
8	PURPLE	8 SDP2-
9	ORANGE	9 SDP2+
SHELL	B.D	SHELL



Scale	1:1							Name
TOLERANCE						Drawn	08.29.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
----------	--

AK673/3-1-R

Title	USB 3.0 Cable, B Male <=> B Male, 9 Pin, Insulation Blue, 1 Meter
-------	---

Drawing No.	
-------------	--

rev00

	Replace
--	---------

Sheet
