



P2

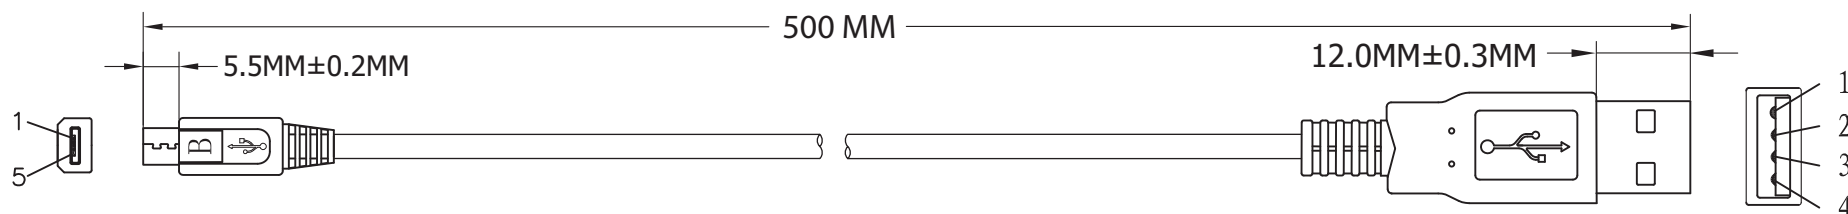

P1



PIN ASSIGNMENT

P1 P2


1 RED 1

2 WHITE 2

3 GREEN 3

5 BLACK 4

SHELL DRAIN + BRAID SHELL

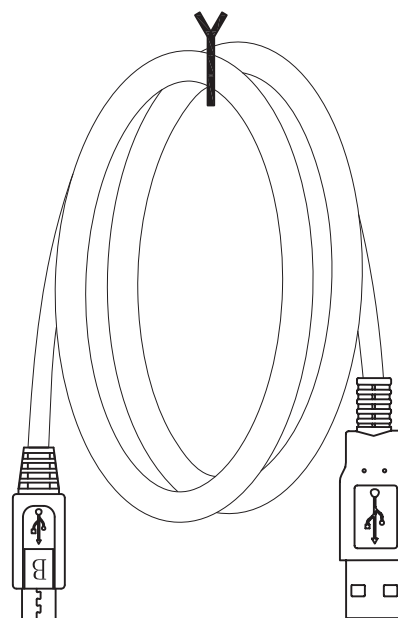

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28 AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
 - Outer Jacket: Black PVC-50P
- P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: White
 - Outer Jacket: Black PVC-40P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5Ω Min.
- Hi-Pot test: 300V DC

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AK67421-0.5-R

Title	USB2.0 Micro Connection Cable, 0.5 Meter USB B Micro Male <=> USB A Male
--------------	---

Drawing No.

rev00

Replace

Sheet

