868MHz; 25 x 25 x 4mm RFID(EU) Patch Antenna

APAE868R2540JBDB2-T

MSL level: Not Applicable



25.0 x 25.0 x 4.0mm

953R-G

Pb in ceramic (exempt per RoHS 2002/95/EC Annex (7)).

FEATURES:

- Compact size
- RoHS Compliance

TYPICAL APPLICATIONS:


RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.

STANDARD SPECIFICATIONS:


Parameters	Min.	Тур.	Max.	Units	Note
Center Frequency @ 10dB bandwidth	868.0±3.0			MHz	(with adhesive tape on 70x70mm ground plane)
-10dB bandwidth	3.0			MHz	
VSWR at Center Frequency			1.5		
Polarization Model		RHCP			
Impedance	50			Ω	
Frequency Temperature Coefficient			20	ppm/°C	

TEST CONDITIONS & TEST SETUP:

Parts shall be measured under a condition (Temp.: 20±15°C, Humidity: 65±20% R.H.)

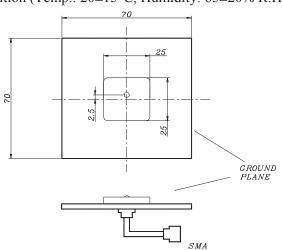

> PART IDENTIFICATION:

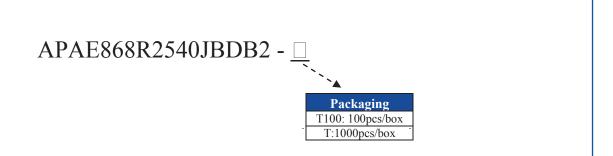





868MHz; 25 x 25 x 4mm RFID(EU) Patch Antenna


APAE868R2540JBDB2-T






This product is RoHS compliant Pb in ceramic (exempt per RoHS 2002/95/EC Annex (7)).

► IMPEDANCE CHARACTERISTICS

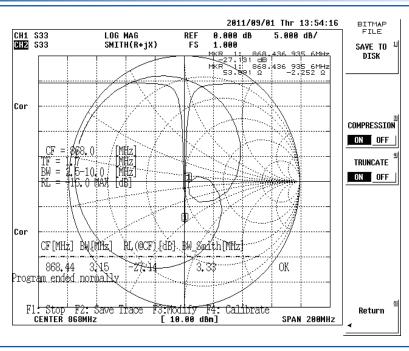

OUTLINE DRAWING:

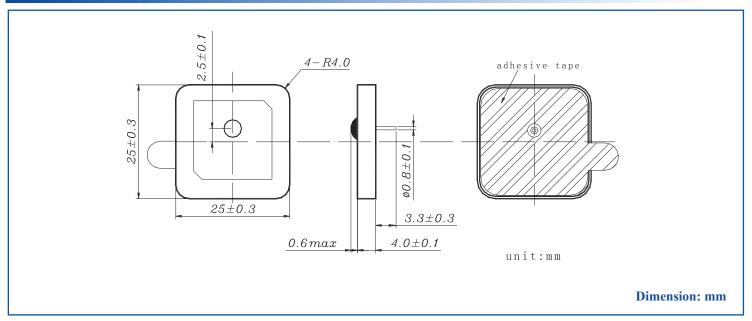





868MHz; 25 x 25 x 4mm RFID(EU) Patch Antenna

APAE868R2540JBDB2-T






This product is RoHS compliant Pb in ceramic (exempt per RoHS 2002/95/EC Annex (7)).

PACKAGING:


T100 = 2 trays containing a total of 100pcs devices

T = 40 trays containing a total of 2000pcs devices

NOTE: This product is vacuum packaged to reduce the possibility of oxidation and/or contamination during storage.

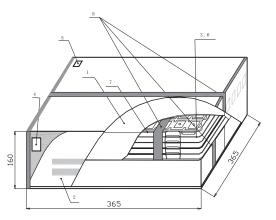

NO.	Name		
1	Inner Box		
2	Package		
3	Vacuum Bag		
4	Certificate of approval		
5	Label		
6	Cushion		
7	Tray		
8	Adhesive tape		

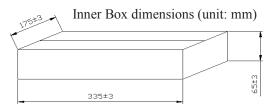

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



