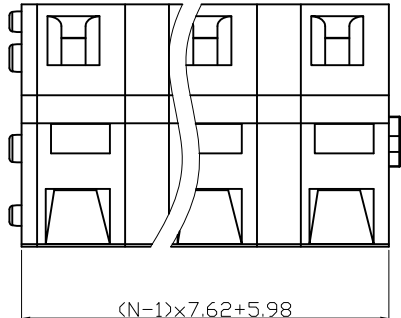
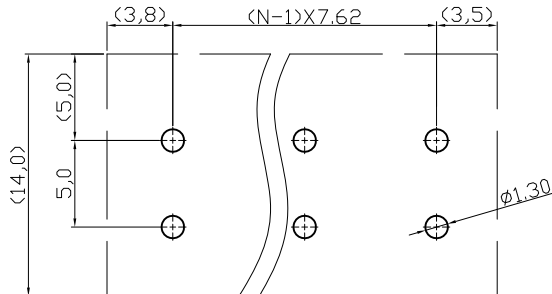
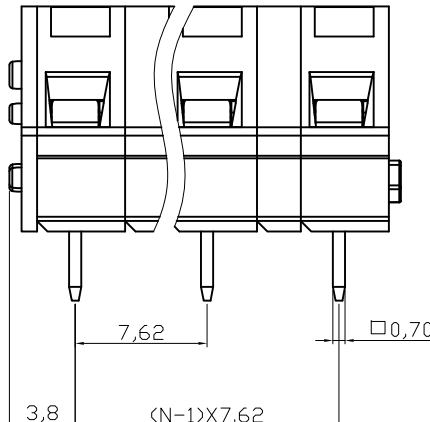
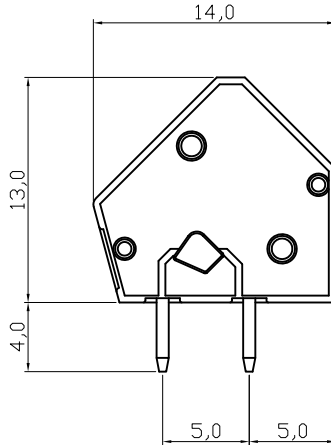


	1	2	3	4	5	6	7																			
A	  RECOMMENDED PCB. LAYOUT							A																		
B								B																		
C								C																		
D	 N=Number of contacts  Material Terminal body (Contact pin): Brass Wire guard: Stainless steel Surface of solder tail: Tin plated Insulator (housing): Thermoplastic (UL94V-0) Electrical Voltage rating: 300VAC Current rating: 15A Wire range: Solid wire(AWG): 12-28 Stranded wire(AWG): 12-28 Pull force: Screw: Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety approval : 							D																		
E								E																		
F								F																		
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.</td><td>±0.50</td></tr><tr><td>X.X</td><td>±0.30</td></tr><tr><td>X.XX</td><td>±0.10</td></tr><tr><td>DIM</td><td>TOL</td></tr><tr><td>X.°</td><td>±1°</td></tr><tr><td>X.X°</td><td>±X°</td></tr><tr><td>Angle</td><td>TOL</td></tr></table>							Scale	1:1	TOLERANCE		X.	±0.50	X.X	±0.30	X.XX	±0.10	DIM	TOL	X.°	±1°	X.X°	±X°	Angle	TOL	G
Scale	1:1																									
TOLERANCE																										
X.	±0.50																									
X.X	±0.30																									
X.XX	±0.10																									
DIM	TOL																									
X.°	±1°																									
X.X°	±X°																									
Angle	TOL																									
H	① Drawn 29.07.2009 Dean ASSMANN W&S components Customer-No. ASSMANN WSW-No. A-TB762-HGxx Drawing-No. ASS 3606 CO rev01 Replace Sheet							H																		
	1	2	3	4	5	6	7	SVxxx																		