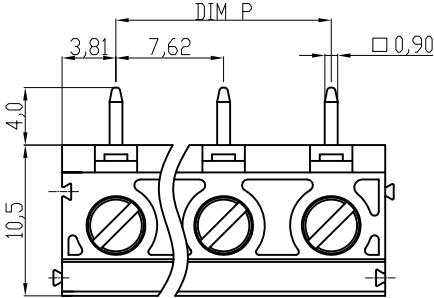
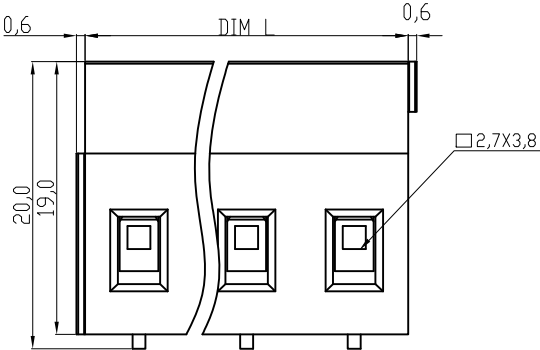
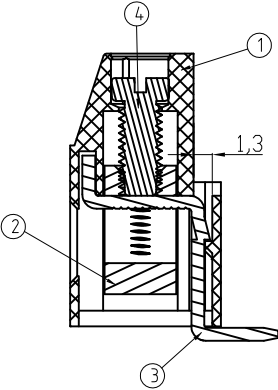
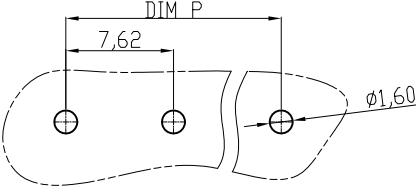


	1	2	3	4	5	6	7																																																																																		
A	Material ①Terminal housing: Thermoplastic (UL94V-0) , GREEN ②Clamp:Brass,Ni plated ③Wire guard solder pin:Copper,Tin plated ④Terminal screw: Steel Zinc plating "-" slot type Electrical cULus Voltage rating: 300VAC Current rating: 20A Wire range: Solid wire(AWG): 12-30 Stranded wire(AWG): 12-30 Torque(Lb-In): 3.5 Screw: M3 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							A																																																																																	
B								B																																																																																	
C								C																																																																																	
D								D																																																																																	
E								E																																																																																	
F	RECOMMENDER PCB LAYOUT RoHS compliant <table><tr><td colspan="2">DIMENSION</td></tr><tr><td>L</td><td>Nx7.62</td></tr><tr><td>P</td><td>(N-1)x7.62</td></tr></table> N=Number of poles <table><tr><td>Poles</td><td>Tolerance</td></tr><tr><td></td><td>DIM L&DIM P</td></tr><tr><td>2p-6p</td><td>±0.15</td></tr><tr><td>7p-12p</td><td>±0.25</td></tr><tr><td>13p-16p</td><td>±0.35</td></tr></table>							DIMENSION		L	Nx7.62	P	(N-1)x7.62	Poles	Tolerance		DIM L&DIM P	2p-6p	±0.15	7p-12p	±0.25	13p-16p	±0.35	F																																																																	
DIMENSION																																																																																									
L	Nx7.62																																																																																								
P	(N-1)x7.62																																																																																								
Poles	Tolerance																																																																																								
	DIM L&DIM P																																																																																								
2p-6p	±0.15																																																																																								
7p-12p	±0.25																																																																																								
13p-16p	±0.35																																																																																								
G	<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>Alex</td><td></td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>Hellwig</td><td>ASSMANN WSW-No.</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td>A-TB762-VJxxV</td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td>ASS 4113 CO</td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="2"></td><td>rev00</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">Replace</td><td>Sheet</td></tr></table>							Scale	1:1					Date	Name	Customer-No.	TOLERANCE						Drawn	Alex		X.	±0.50					Approved	Hellwig	ASSMANN WSW-No.	X.X	±0.30							A-TB762-VJxxV	X.XX	±0.10								DIM	TOL							Drawing-No.	X.°	±1°							ASS 4113 CO			①	Drawn	19.04.2010	Alex			rev00	Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet	G
Scale	1:1					Date	Name	Customer-No.																																																																																	
TOLERANCE						Drawn	Alex																																																																																		
X.	±0.50					Approved	Hellwig	ASSMANN WSW-No.																																																																																	
X.X	±0.30							A-TB762-VJxxV																																																																																	
X.XX	±0.10																																																																																								
DIM	TOL							Drawing-No.																																																																																	
X.°	±1°							ASS 4113 CO																																																																																	
		①	Drawn	19.04.2010	Alex			rev00																																																																																	
Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet																																																																																	
H								H																																																																																	
	1	2	3	4	5	6	7																																																																																		