



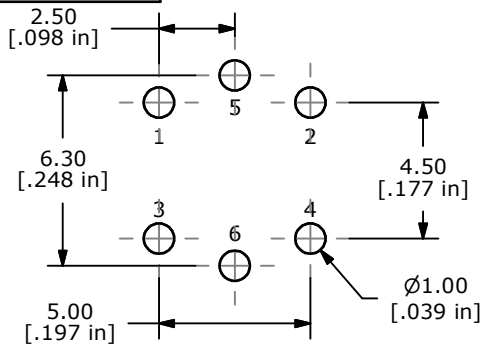

P.C.B. LAYOUT






CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
- ▲6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2±0.1mm
8. OPERATING TEMPERATURE: -20°C TO 70°C
9. OPERATING LIFE: 500,000 CYCLES (G)
- ▲10. LED: YELLOW
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT

LED SPECS	UNITS	YELLOW	(G)
FORWARD CURRENT	mA	20 TYP.	
FORWARD VOLTAGE	V	2.0 TYP. - 2.5 MAX.	
LUMINOUS INTENSITY	MCD	1800 TYP.	(F)

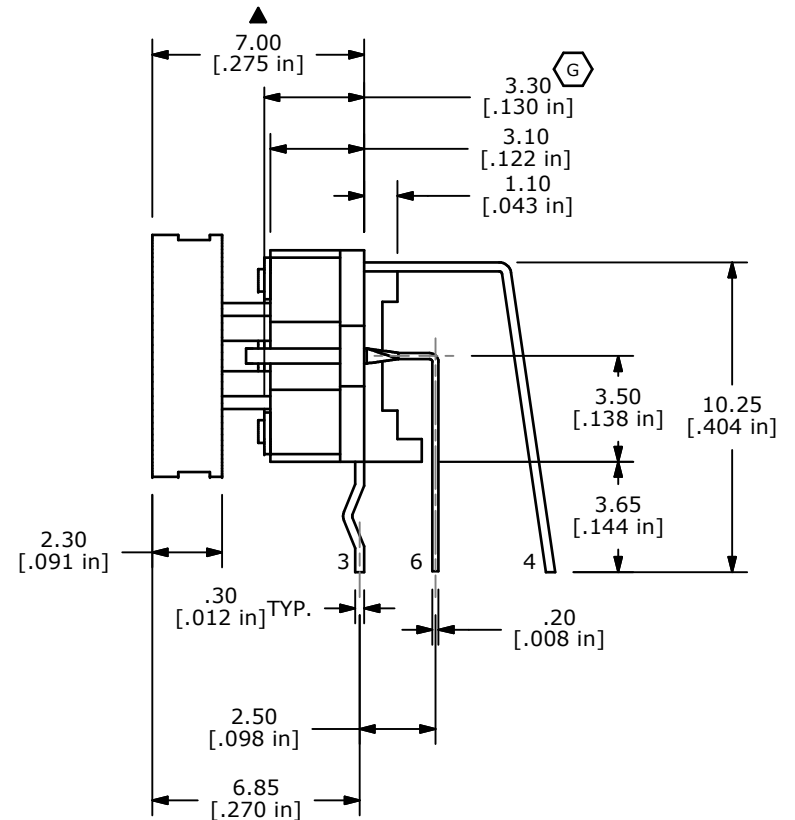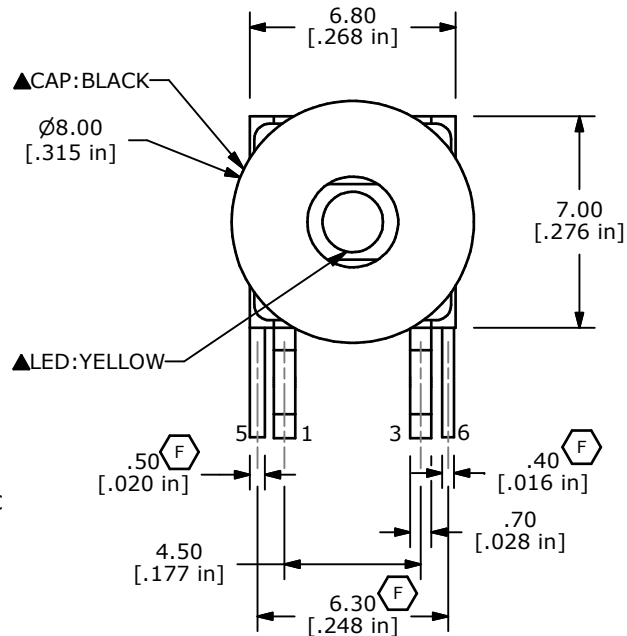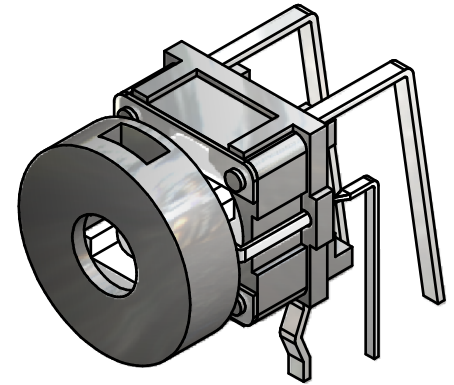

G	19956	CORRECT NOTES / LED CHART/ DIM	05/23/11	BMA
F	19542	UPDATE DRAWING	12/21/10	BGL
E	17280	ADD GENERAL TOLERANCE NOTE	5/11/07	TN
D	16026	UPDATE LED SPECS	5/16/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1260YQRBLK

SCALE 4:1

DATE 5/11/2007

DR TN

DWG B200001

REV G