



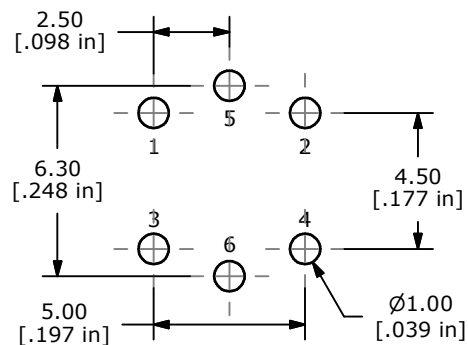

## P.C.B. LAYOUT






CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
- ▲6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPERATURE: -20°C TO 70°C
9. OPERATING LIFE: 500,000 CYCLES 
- ▲10. LED: RED
11. ▲ DENOTES CRITICAL PARAMETERS
12. 1992/95/EC (ROHS) COMPLIANT

| LED SPECS          | UNITS | RED                 |
|--------------------|-------|---------------------|
| FORWARD CURRENT    | mA    | 20 TYP.             |
| FORWARD VOLTAGE    | V     | 2.0 TYP. - 2.5 MAX. |
| LUMINOUS INTENSITY | MCD   | 1800 TYP.           |

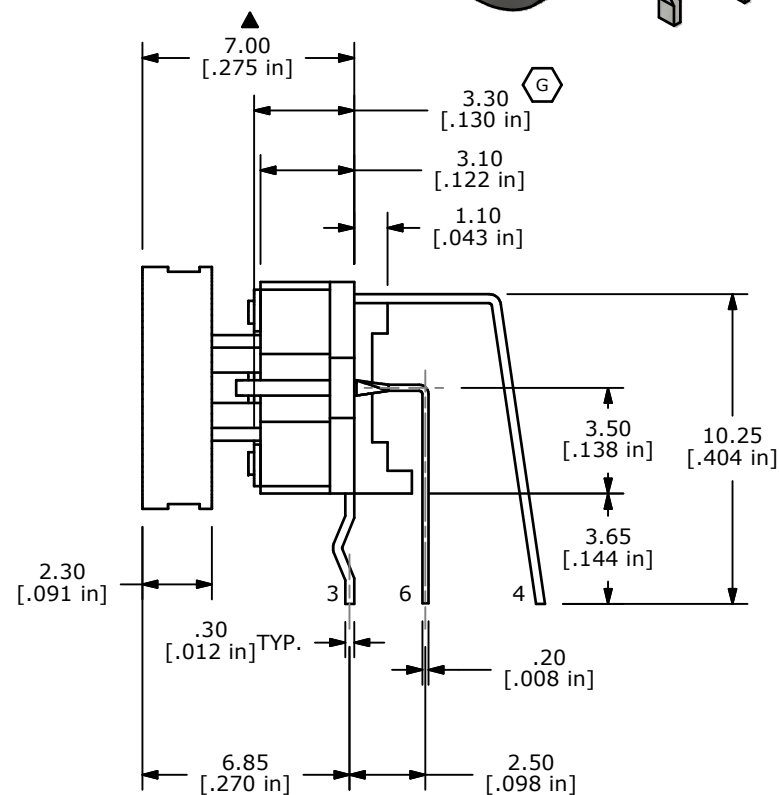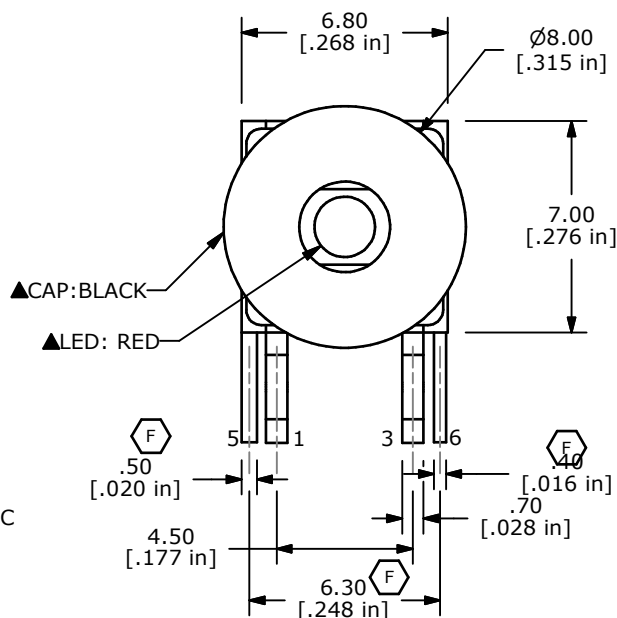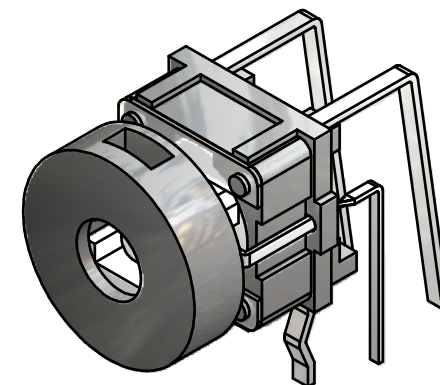

|     |        |                                 |          |     |
|-----|--------|---------------------------------|----------|-----|
| G   | 19956  | CORRECT NOTES / LED CHART / DIM | 05/23/11 | BMA |
| F   | 19542  | UPDATE DRAWING                  | 12/21/10 | BGL |
| E   | 17280  | ADD. GENERAL TOLERANCE NOTE     | 5/11/07  | TN  |
| D   | 16026  | UPDATE LED SPECS                | 5/16/06  | CT  |
| REV | PCR NO | DESCRIPTION                     | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1260RQRBLK

SCALE 4:1

DATE 5/11/2007

|    |
|----|
| DR |
| TN |

DWG B200002

REV  
G