

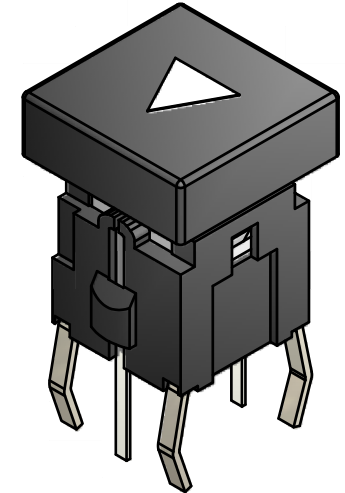
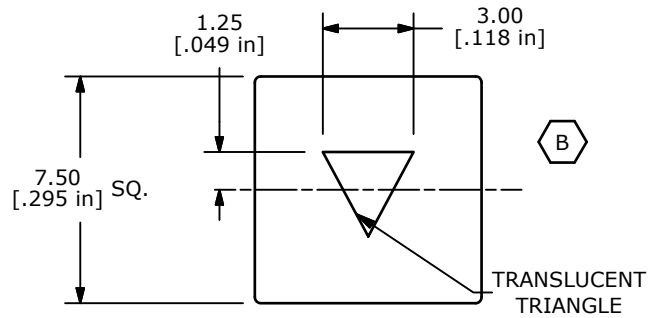



LED SPECS ▲	UNITS	WHITE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	3.2-4.0
LUMINOUS INTENSITY @ 20mA	MCD	100

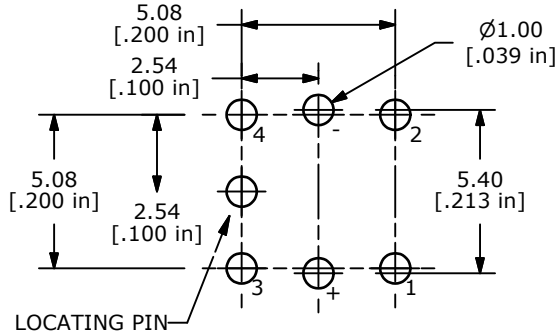


WHITE LED ▲
CIRCUIT: SPST

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 12VDC @ 50mA
- CONTACT RESISTANCE: 100 Milli-OHMS MAX.
- INSULATION RESISTANCE: 100 Mega-OHMS MIN.
- OPERATING FORCE: 180±50gf
- TRAVEL: 0.2±0.1mm
- OPERATING TEMPERATURE: -20°C TO 70°C
- OPERATING LIFE: 500,000 CYCLES
- LED: GREEN
- ▲ DENOTES CRITICAL PARAMETERS
- 2002/95/EC (ROHS) COMPLIANT
- PARTS TO BE PACKAGE 100 PARTS PER TRAY.

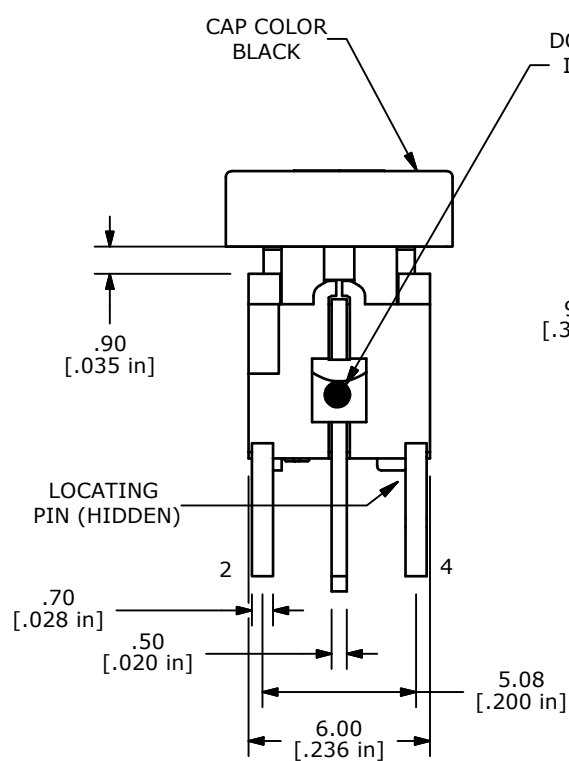

DOT MARKING
INDICATES
CATHODE

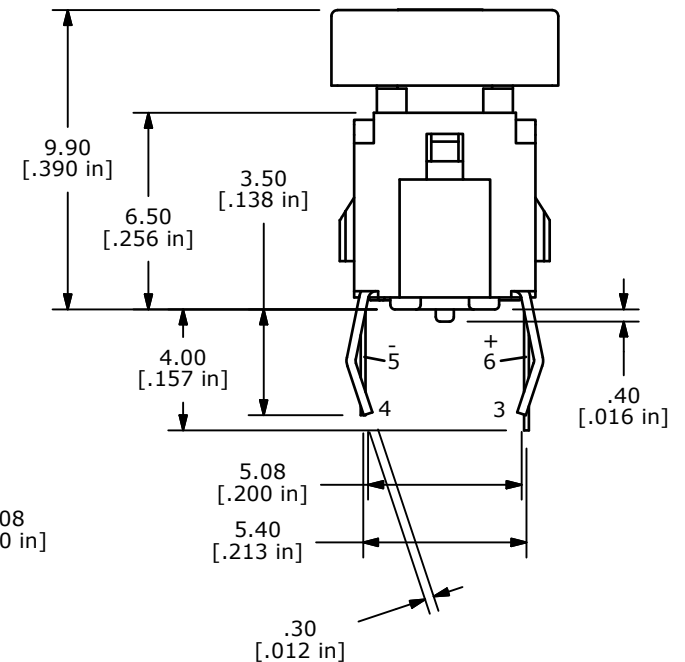

TITLE TL1220S1NNBW-TRI

B	19930	CHANGE ORIENTATION OF SYMBOL	5/9/11	BGL
A	19903	Release for Production	5/4/11	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	4	DATE	5/4/2011	DR	BMA	DWG	B260014	REV	B
-------	---	------	----------	----	-----	-----	---------	-----	---