

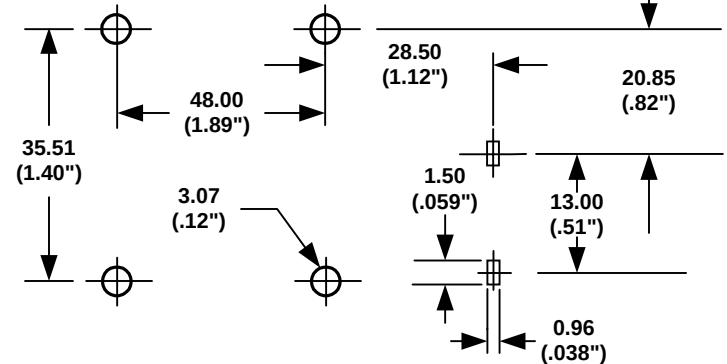


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

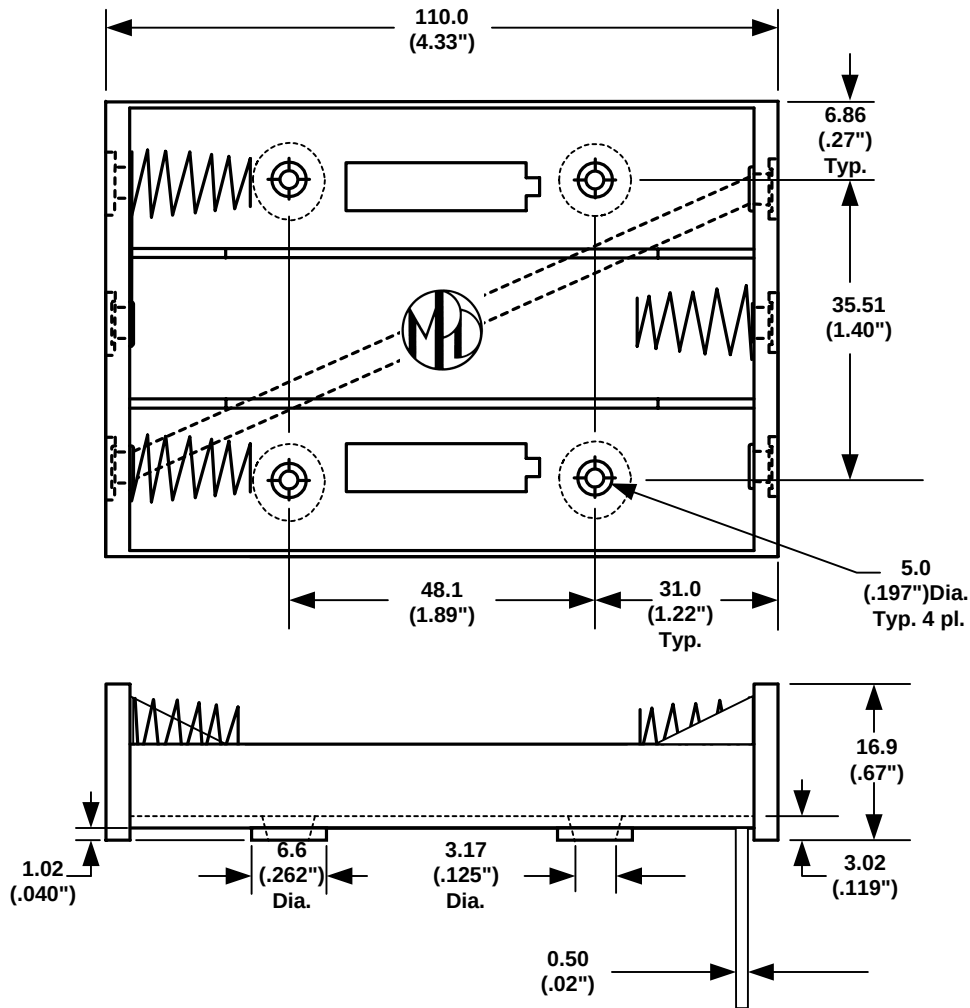

PCB LAYOUT

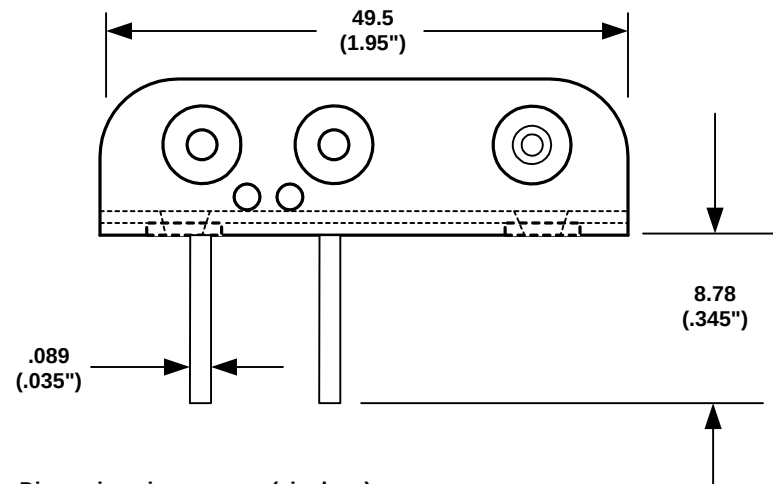

ORDERING CODE BH36AA

SPECIFICATIONS :

Plastic material - High impact ABS
Springs - nickel plated spring steel
Wire - 152.4 mm Ref. Long 26 AWG,
UL1007, CSA - TR-64, 300V, 80°C.
Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS = SF
PC PINS = PC

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		Memory Protection Devices, Inc.	
		200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL		SCALE	DRAWN BY B.S.
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	SIX "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	05/16/2001	BH36AAPC	