

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6 - 2RQ - S

M BZE6 - 2RQ - S

DRAWING
NUMBER

ISSUE
X15

REPLACES

PR-14307

29AUG07

PSR

CHECK

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

8 NOV 85

REVISIONS

A	PR-14307
4	MAM 4 NOV 85
B	C072618
11	LJF 11 SEP 92
C	0016894
10	KRB 10 NOV 05
D	0033014
29	BS 29AUG07

RASTER
FO-92881-B

DRAWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE - - - - - 9 - 13 OZ

RELEASE FORCE - - - - - 4 OZ MIN

DIFFERENTIAL TRAVEL - - - - - .002 MAX

OVERTRAVEL - - - - - .219 MIN

BASIC SWITCH REPLACEMENT - - BZ - 2RQ66

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L74

15A 125, 250, OR 480VAC 2A 600 VAC

1/8 HP 125 VAC, 1/4 HP 250 VAC

1/2A 125 VDC, 1/4A 250 VDC

CE 1.5A, 240 Vac

UL

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±


DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	
ONE PLACE	X, X	0.4/016	X X 0.8/03
TWO PLACES	X, XX	0.15/0.008	X XX 0.38/015
THREE PLACES			X XXX 0.13/005
ANGLES			

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT .53 LB

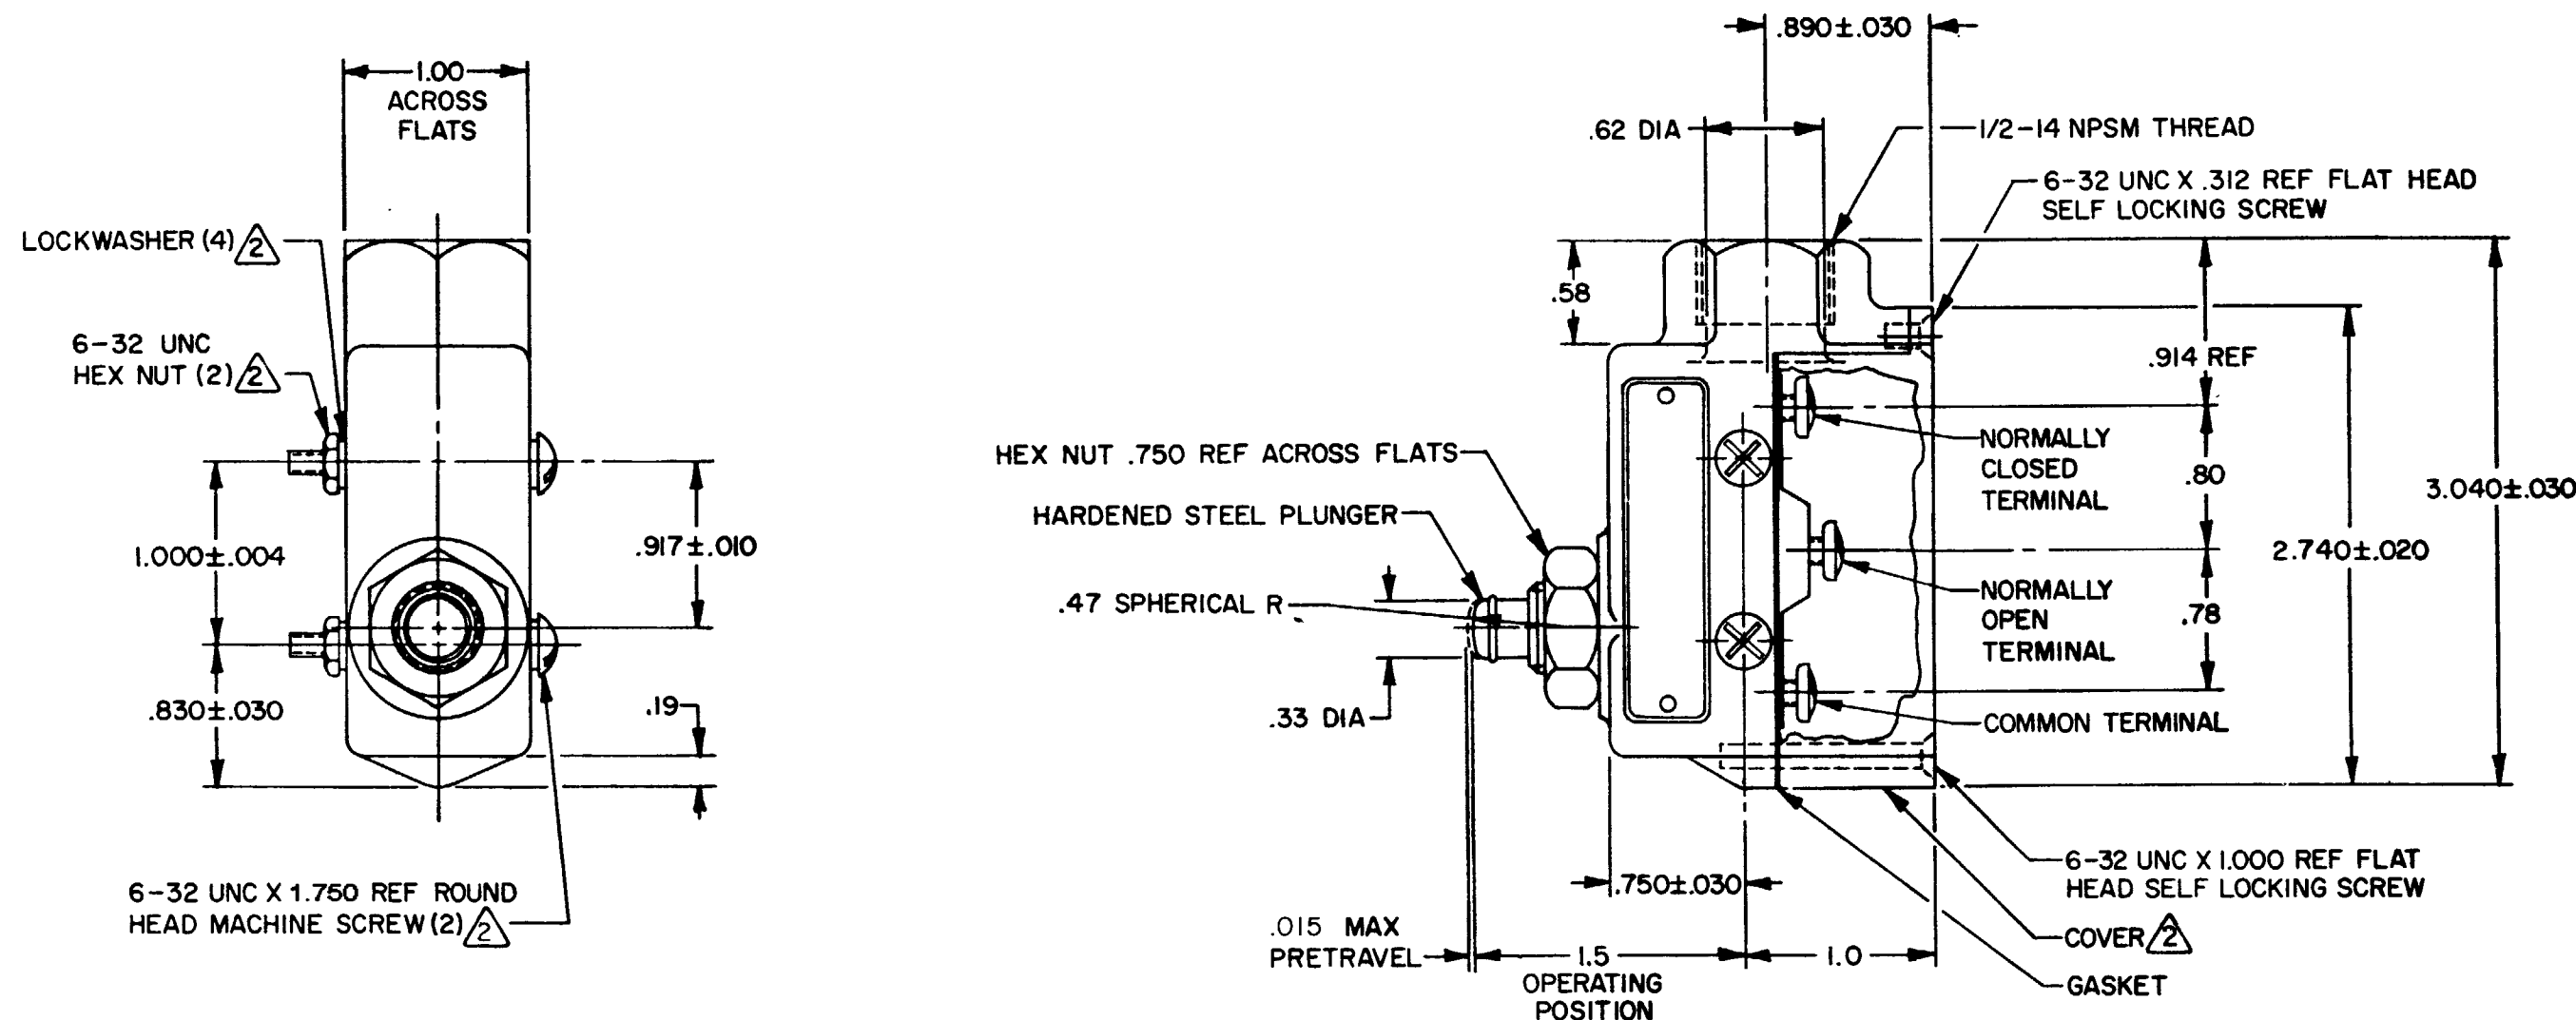

NOTES -

- 2 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3) FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA1 IP40