

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-RQ2

BZE6-RQ2

M

DRAWING
NUMBER

8

8

ISSUE

8

PSR

REVISIONS

A

CO53191-G

2

CJH

MAY 84

B

CO55989

6

JAS

NOV 84

C

CO54958

TSK

26 FEB 85

D

CO72618

LJF

11 SEP 92

E

CO81513B

JAK

4 MAR 97

F

0016894

KRB

10 NOV 05

G

0033014

BS

29AUG07

WJM

27 FEB 80

DRAWN

WJM

27 FEB 80

WJM

27 FEB 80

WJM

27 FEB 80

WJM

27 FEB 80

REPLACES

PR-8488

29AUG07

PSR

CHECK

ROB

11 MAR 80

CHECK

ROB

11 MAR 80

CHECK

GLH




CHECK

WJM

27 FEB 80

WJM

27 FEB 80

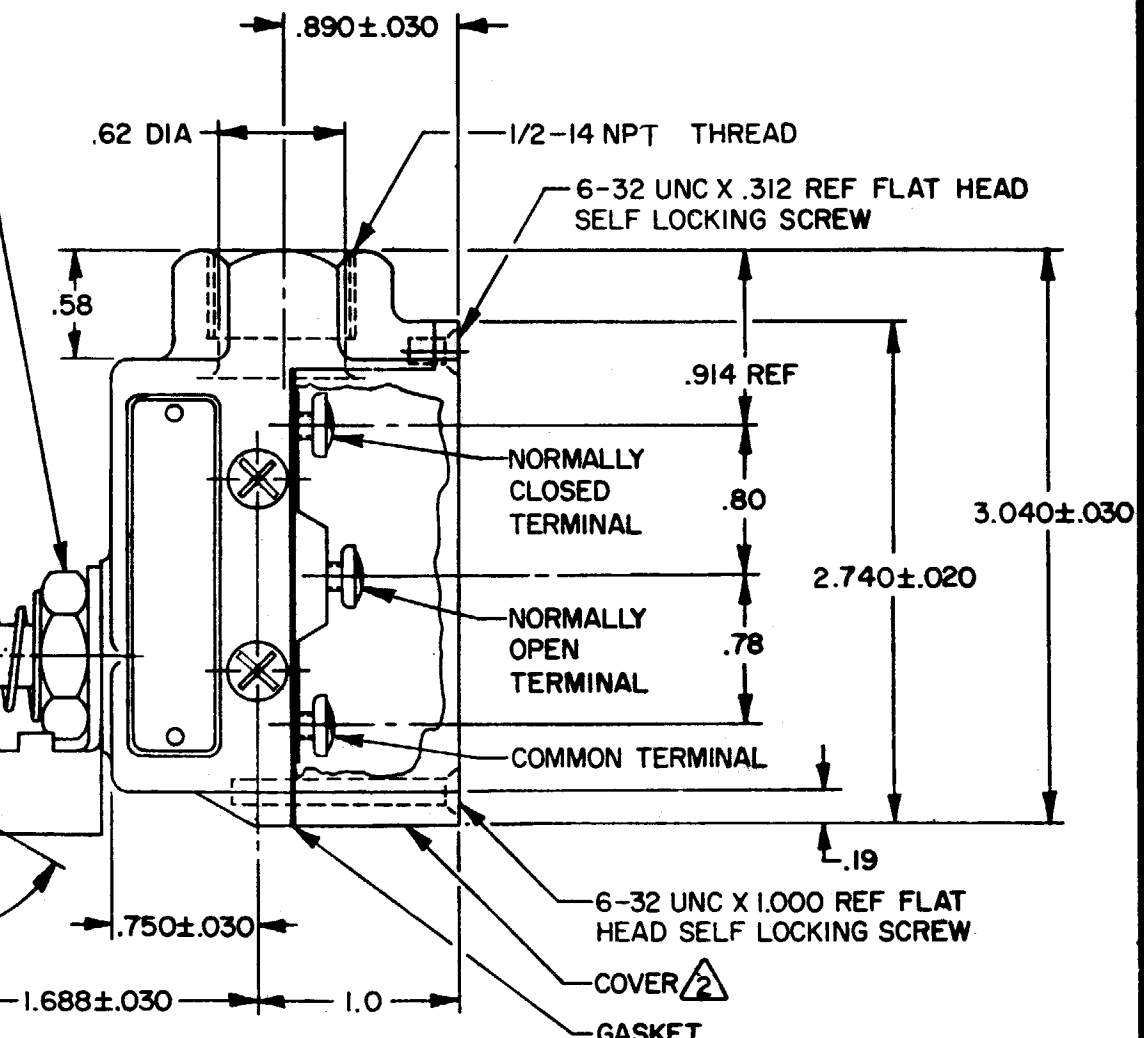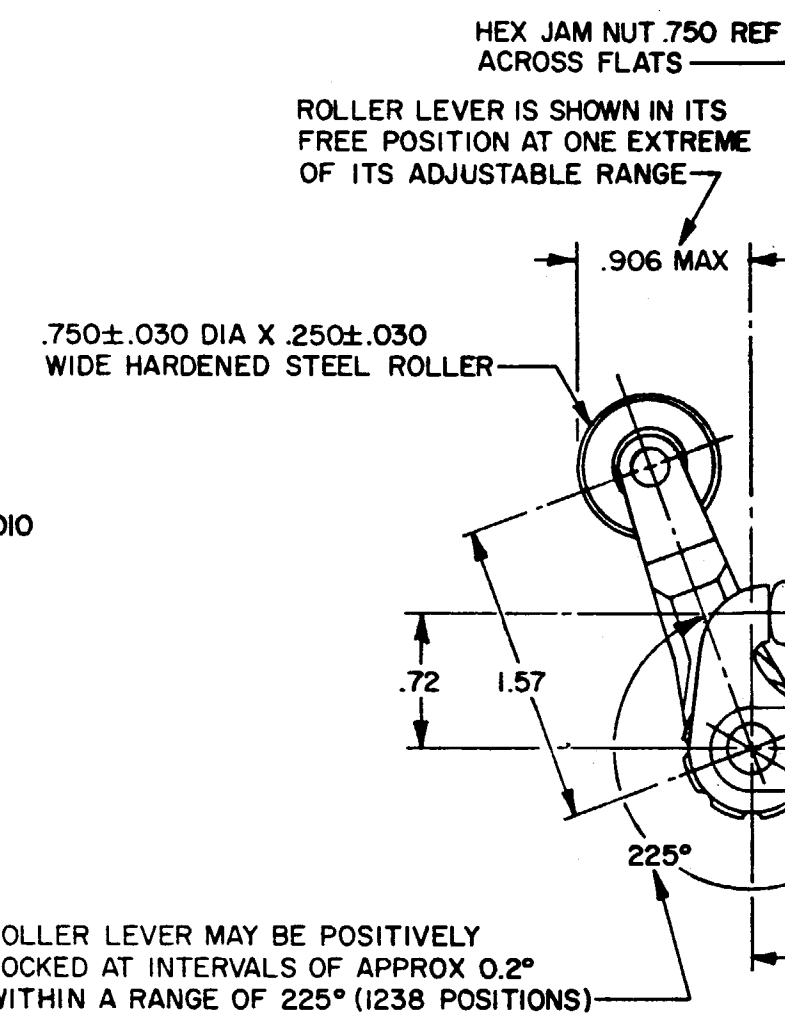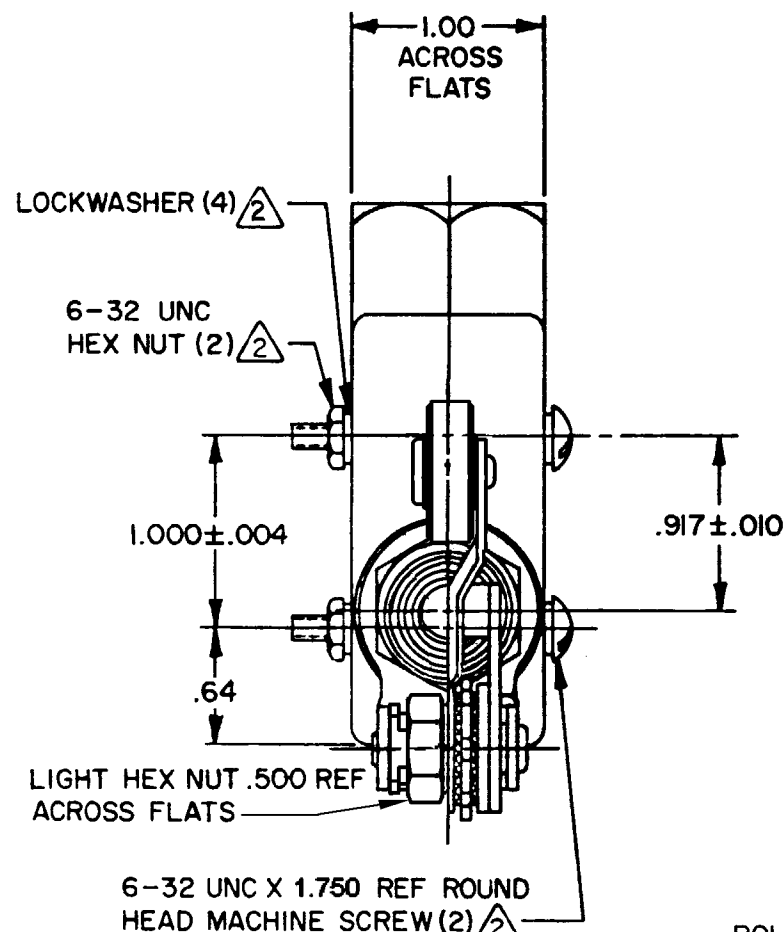

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- ² - FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART AROUND AXIS OF PLUNGER
- 4 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9-17 OZ

RELEASE FORCE ----- 6 OZ MIN

PRETRAVEL ----- .188 MAX

DIFFERENTIAL TRAVEL ----- .0015 MAX

OVERTRAVEL ----- .219 MIN

BASIC SWITCH REPLACEMENT ----- BZ-RQ68

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC
1/8 HP-125 VAC, 1/4 HP-250 VAC
CODE L103

CE 1.5A, 240 Vac

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.080
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.008
ANGLES

WEIGHT .71 LB