


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

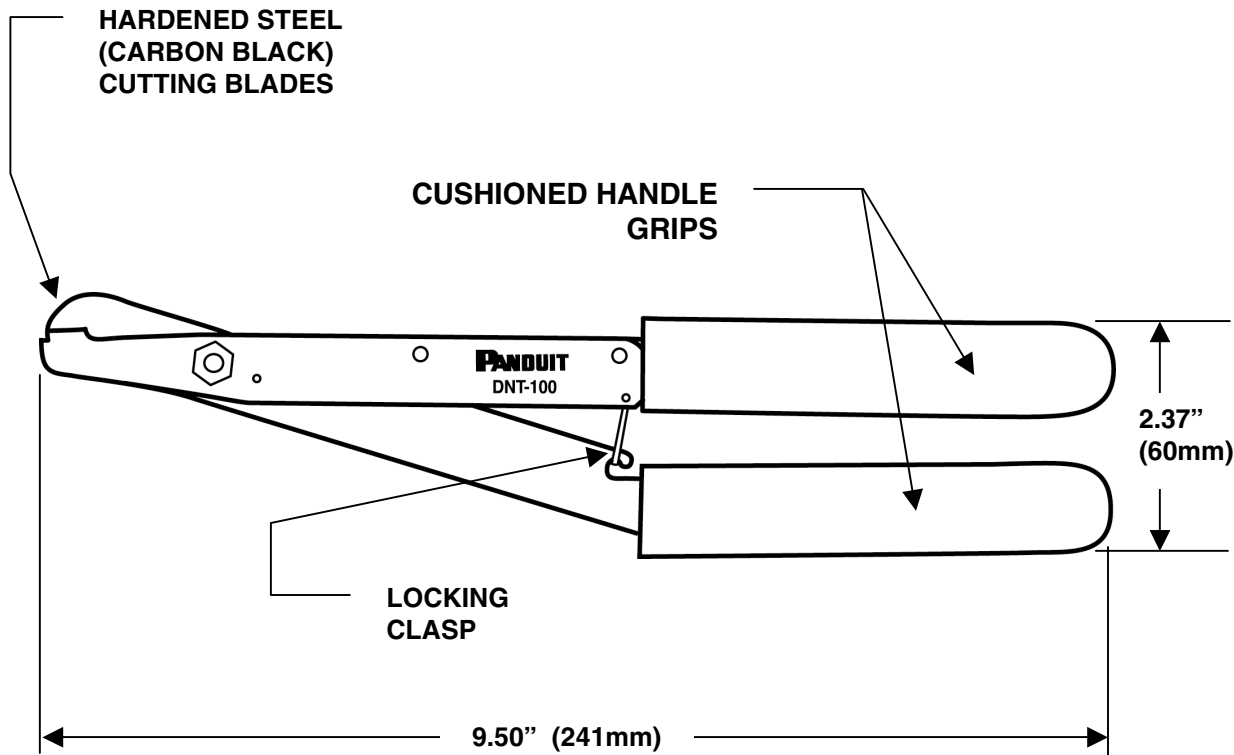

#### NOTES:


For use with *PANDUCT* Plastic Wiring Duct.

- Used to notch the duct sidewall down to the scoreline to facilitate finger breakouts for corner and 'T' junctions.
- Spring loaded in open position. (Closed position shown in drawing.)

**DIMENSIONS ARE FOR  
REFERENCE ONLY.**

**WEIGHT:** 9.1 oz.  
(258 gr.)

F:/rvusers/engdocsnew/custdwg/  
WD24978A01\_00 DNT-100.doc

									<div><div></div><div><b>PANDUIT</b></div></div> <div>CORP. TINLEY PARK, ILLINOIS</div>				
									<div><b>DNT-100 DUCT NOTCHING TOOL</b></div> <div><b>CUSTOMER DRAWING</b></div>				
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
									(.x) ±    ---    (.xxx) ±    ---				
									(.xx) ±    ---    ANGLES ±    ---				
									DRAWN BY: BLR	MATL:  -----	SCALE  NONE		
00	3-15-05	BLR	MBR	RLSD; RPLCS: DNT-09534A-CD	4153	--	DLWE		DATE: 3-15-05		DRAWING NO.  WD24978A01		DWG A SIZE
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: MBR				