



Safety Standard Certified Type KY/KH/KX Specifications and Test Methods

Operating Temperature Range: -25 to +125°C



No.	Item		Specifications	Test Method																								
1	Appearance and Dimensions		No visible defect, and dimensions are within specified range.	The capacitor should be visually inspected for evidence of defect. Dimensions should be measured with slide calipers.																								
2	Marking		To be easily legible	The capacitor should be visually inspected.																								
3	Capacitance		Within specified tolerance	The capacitance, dissipation factor and Q should be measured at 20°C with 1±0.1kHz (char. SL: 1±0.1MHz) and AC5V(r.m.s.) max.																								
4	Dissipation Factor (D.F.) Q		<table><tr><th>Char.</th><th>Specifications</th></tr><tr><td>B, E</td><td>D.F.≤2.5%</td></tr><tr><td>F</td><td>D.F.≤5.0%</td></tr><tr><td>SL</td><td>Q≥400+20C^{*1}(C<30pF) Q≥1000 (C≥30pF)</td></tr></table>		Char.	Specifications	B, E	D.F.≤2.5%	F	D.F.≤5.0%	SL	Q≥400+20C ^{*1} (C<30pF) Q≥1000 (C≥30pF)																
Char.	Specifications																											
B, E	D.F.≤2.5%																											
F	D.F.≤5.0%																											
SL	Q≥400+20C ^{*1} (C<30pF) Q≥1000 (C≥30pF)																											
5	Insulation Resistance (I.R.)		10000MΩ min.	The insulation resistance should be measured with DC500±50V within 60±5 sec. of charging. The voltage should be applied to the capacitor through a resistor of 1MΩ.																								
6	Dielectric Strength	Between Lead Wires	No failure	<p>The capacitor should not be damaged when the test voltages from Table 1 are applied between the lead wires for 60 sec.</p> <p><Table 1></p> <table><tr><th>Type</th><th>Test Voltage</th></tr><tr><td>KY</td><td>For lead spacing F=5mm AC2000V(r.m.s.) For lead spacing F=7.5mm AC2600V(r.m.s.)</td></tr><tr><td>KH</td><td>AC2600V(r.m.s.)</td></tr><tr><td>KX</td><td>AC4000V(r.m.s.)</td></tr></table>	Type	Test Voltage	KY	For lead spacing F=5mm AC2000V(r.m.s.) For lead spacing F=7.5mm AC2600V(r.m.s.)	KH	AC2600V(r.m.s.)	KX	AC4000V(r.m.s.)																
		Type	Test Voltage																									
KY	For lead spacing F=5mm AC2000V(r.m.s.) For lead spacing F=7.5mm AC2600V(r.m.s.)																											
KH	AC2600V(r.m.s.)																											
KX	AC4000V(r.m.s.)																											
		Body Insulation	No failure	<p>First, the terminals of the capacitor should be connected together. Then, as shown in the figure at right, a metal foil should be closely wrapped around the body of the capacitor to the distance of about 3 to 6mm from each terminal.</p> <p>Then, the capacitor should be inserted into a container filled with metal balls of about 1mm diameter. Finally, AC voltage from Table 2 is applied for 60 sec. between the capacitor lead wires and metal balls.</p> <p><Table 2></p> <table><tr><th>Type</th><th>Test Voltage</th></tr><tr><td>KY</td><td>AC2600V(r.m.s.)</td></tr><tr><td>KH</td><td>AC2600V(r.m.s.)</td></tr><tr><td>KX</td><td>AC4000V(r.m.s.)</td></tr></table> 	Type	Test Voltage	KY	AC2600V(r.m.s.)	KH	AC2600V(r.m.s.)	KX	AC4000V(r.m.s.)																
Type	Test Voltage																											
KY	AC2600V(r.m.s.)																											
KH	AC2600V(r.m.s.)																											
KX	AC4000V(r.m.s.)																											
7	Temperature Characteristics		<table><tr><th>Char.</th><th>Capacitance Change</th></tr><tr><td>B</td><td>Within ±10%</td></tr><tr><td>E</td><td>Within ±20/55%</td></tr><tr><td>F</td><td>Within ±30/80%</td></tr></table> (Temp. range: -25 to +85°C) <table><tr><th>Char.</th><th>Temperature Coefficient</th></tr><tr><td>SL</td><td>+350 to -1000ppm/°C</td></tr></table> (Temp. range: +20 to +85°C)	Char.	Capacitance Change	B	Within ±10%	E	Within ±20/55%	F	Within ±30/80%	Char.	Temperature Coefficient	SL	+350 to -1000ppm/°C	<p>The capacitance measurement should be made at each step specified in Table 3.</p> <p><Table 3></p> <table><tr><th>Step</th><th>Temperature (°C)</th></tr><tr><td>1</td><td>20±2</td></tr><tr><td>2</td><td>-25±2</td></tr><tr><td>3</td><td>20±2</td></tr><tr><td>4</td><td>85±2</td></tr><tr><td>5</td><td>20±2</td></tr></table>	Step	Temperature (°C)	1	20±2	2	-25±2	3	20±2	4	85±2	5	20±2
Char.	Capacitance Change																											
B	Within ±10%																											
E	Within ±20/55%																											
F	Within ±30/80%																											
Char.	Temperature Coefficient																											
SL	+350 to -1000ppm/°C																											
Step	Temperature (°C)																											
1	20±2																											
2	-25±2																											
3	20±2																											
4	85±2																											
5	20±2																											
8	Solderability of Leads		Lead wire should be soldered with uniform coating on the axial direction over 3/4 of the circumferential direction.	<p>The lead wire of a capacitor should be dipped into molten solder for 2±0.5 sec.</p> <p>The depth of immersion is up to about 1.5 to 2.0mm from the root of lead wires.</p> <p>Temp. of solder: Lead Free Solder (Sn-3Ag-0.5Cu) 245±5°C H63 Eutectic Solder 235±5°C</p>																								

*1 "C" expresses nominal capacitance value (pF).

Continued on the following page. 

Safety Standard Certified Type KY/KH/KX Specifications and Test Methods

Continued from the preceding page.

No.	Item	Specifications	Test Method
9	Soldering Effect (Non-Preheat)	Appearance	<p>As shown in the figure, the lead wires should be immersed in solder of $350\pm10^{\circ}\text{C}$ or $260\pm5^{\circ}\text{C}$ up to 1.5 to 2.0mm from the root of terminal for 3.5 ± 0.5 sec. (10 ± 1 sec. for $260\pm5^{\circ}\text{C}$).</p> <p>Pre-treatment: Capacitor should be stored at $85\pm2^{\circ}\text{C}$ for 1 hr., then placed at room condition*² for 24\pm2 hrs. before initial measurements.</p> <p>Post-treatment: Capacitor should be stored for 1 to 2 hrs. at room condition.*²</p> 
		Capacitance Change	
		I.R.	
		Dielectric Strength	
10	Soldering Effect (On-Preheat)	Appearance	<p>First the capacitor should be stored at $120+0/-5^{\circ}\text{C}$ for 60+0/-5 sec.</p> <p>Then, as in the figure, the lead wires should be immersed in solder of $260+0/-5^{\circ}\text{C}$ up to 1.5 to 2.0mm from the root of terminal for $7.5+0/-1$ sec.</p> <p>Pre-treatment: Capacitor should be stored at $85\pm2^{\circ}\text{C}$ for 1 hr., then placed at room condition*² for 24\pm2 hrs. before initial measurements.</p> <p>Post-treatment: Capacitor should be stored for 1 to 2 hrs. at room condition.*²</p> 
		Capacitance Change	
		I.R.	
		Dielectric Strength	
11	Vibration Resistance	Appearance	<p>The capacitor should be firmly soldered to the supporting lead wire and vibrated at a frequency range of 10 to 55Hz, 1.5mm in total amplitude, with about a 1-minute rate of vibration change from 10Hz to 55Hz and back to 10Hz.</p> <p>Apply for a total of 6 hrs., 2 hrs. each in 3 mutually perpendicular directions.</p>
		Capacitance	
		D.F. Q	
12	Humidity (Under Steady State)	Appearance	<p>Set the capacitor for 500\pm12 hrs. at $40\pm2^{\circ}\text{C}$ in 90 to 95% relative humidity.</p> <p>Post-treatment: Capacitor should be stored for 1 to 2 hrs. at room condition.*²</p>
		Capacitance Change	
		D.F. Q	
		I.R.	
		Dielectric Strength	
13	Humidity Loading	Appearance	<p>Apply the rated voltage for 500\pm12 hrs. at $40\pm2^{\circ}\text{C}$ in 90 to 95% relative humidity.</p> <p>Post-treatment: Capacitor should be stored for 1 to 2 hrs. at room condition.*²</p>
		Capacitance Change	
		D.F. Q	
		I.R.	
		Dielectric Strength	




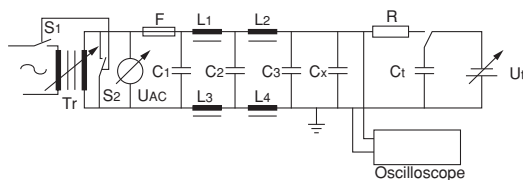

*1 "C" expresses nominal capacitance value (pF).

*2 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Continued on the following page.

Safety Standard Certified Type KY/KH/KX Specifications and Test Methods


Continued from the preceding page.

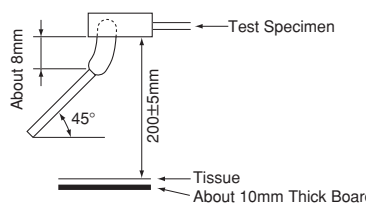
No.	Item		Specifications	Test Method					
14	Life	Appearance	No marked defect	<p>Impulse Voltage</p> <p>Each individual capacitor should be subjected to a 5kV (Type KX: 8kV) impulses for three times. Then the capacitors are applied to life test.</p>  <p>Front time (T_1) = 1.2μs = 1.67T Time to half-value (T_2) = 50μs</p> <p>Apply a voltage from Table 4 for 1000 hrs. at 125+2/-0°C, and relative humidity of 50% max.</p> <p><Table 4></p> <table border="1"><thead><tr><th>Applied Voltage</th></tr></thead><tbody><tr><td>170% of Rated Voltage except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.</td></tr></tbody></table> <p>Post-treatment: Capacitor should be stored for 1 to 2 hrs. at room condition.*2</p>	Applied Voltage	170% of Rated Voltage except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.			
		Applied Voltage							
		170% of Rated Voltage except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.							
		Capacitance Change	Within $\pm 20\%$						
I.R.	3000M Ω min.								
Dielectric Strength	Per Item 6								
15	Flame Test		<p>The capacitor flame extinguishes as follows.</p> <table border="1"><thead><tr><th>Cycle</th><th>Time (sec.)</th></tr></thead><tbody><tr><td>1 to 4</td><td>30 max.</td></tr><tr><td>5</td><td>60 max.</td></tr></tbody></table>  <p>Gas Burner: Inside Dia. 9.5 (in mm)</p>	Cycle	Time (sec.)	1 to 4	30 max.	5	60 max.
Cycle	Time (sec.)								
1 to 4	30 max.								
5	60 max.								
16	Robustness of Terminations	Tensile	Lead wire should not be cut off. Capacitor should not be broken.	<p>As shown in the figure at right, fix the body of the capacitor and apply a tensile weight gradually to each lead wire in the radial direction of the capacitor up to 10N and keep it for 10\pm1 sec.</p>  <p>Each lead wire should be subjected to 5N of weight and bent 90° at the point of egress, in one direction, then returned to its original position and bent 90° in the opposite direction at the rate of one bend in 2 to 3 sec.</p>					
		Bending							
17	Active Flammability		<p>The cheesecloth should not be on fire.</p>  <p>$C_{1,2}$: 1μF$\pm 10\%$ C_3 : 0.033μF$\pm 5\%$ 10kV L_1 to 4 : 1.5mH$\pm 20\%$ 16A Rod core choke C_t : 3μF$\pm 5\%$ 10kV R : 100$\Omega \pm 2\%$ C_x : Capacitor under test UAC : $U_R \pm 5\%$ F : Fuse, Rated 10A U_R : Rated Voltage U_t : Voltage applied to C_t</p> 						

*2 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. 

Safety Standard Certified Type KY/KH/KX Specifications and Test Methods

 Continued from the preceding page.

No.	Item		Specifications	Test Method																											
18	Passive Flammability		The burning time should not exceed 30 sec. The tissue paper should not ignite.	<p>The capacitor under test should be held in the flame in the position that best promotes burning. Each specimen should only be exposed once to the flame. Time of exposure to flame: 30 sec.</p> <p>Length of flame : 12±1mm Gas burner : Length 35mm min. Inside Dia. 0.5±0.1mm Outside Dia. 0.9mm max. Gas : Butane gas Purity 95% min.</p> 																											
19	Temperature and Immersion Cycle	Appearance	No marked defect	<p>The capacitor should be subjected to 5 temperature cycles, then consecutively to 2 immersion cycles.</p> <p><Temperature Cycle></p> <table><tr><th>Step</th><th>Temperature (°C)</th><th>Time (min)</th></tr><tr><td>1</td><td>-25+0/-3</td><td>30</td></tr><tr><td>2</td><td>Room temp.</td><td>3</td></tr><tr><td>3</td><td>125+3/-0</td><td>30</td></tr><tr><td>4</td><td>Room temp.</td><td>3</td></tr></table> <p>Cycle time: 5 cycles</p> <p><Immersion Cycle></p> <table><tr><th>Step</th><th>Temperature (°C)</th><th>Time (min)</th><th>Immersion Water</th></tr><tr><td>1</td><td>65+5/-0</td><td>15</td><td>Clean water</td></tr><tr><td>2</td><td>0±3</td><td>15</td><td>Salt water</td></tr></table> <p>Cycle time: 2 cycles</p> <p>Pre-treatment: Capacitor should be stored at 85±2°C for 1 hr., then placed at room condition*² for 24±2 hrs.</p> <p>Post-treatment: Capacitor should be stored for 24±2 hrs. at room condition.*²</p>	Step	Temperature (°C)	Time (min)	1	-25+0/-3	30	2	Room temp.	3	3	125+3/-0	30	4	Room temp.	3	Step	Temperature (°C)	Time (min)	Immersion Water	1	65+5/-0	15	Clean water	2	0±3	15	Salt water
		Step	Temperature (°C)		Time (min)																										
		1	-25+0/-3		30																										
		2	Room temp.		3																										
		3	125+3/-0		30																										
4	Room temp.	3																													
Step	Temperature (°C)	Time (min)	Immersion Water																												
1	65+5/-0	15	Clean water																												
2	0±3	15	Salt water																												
Capacitance Change	<table><tr><th>Char.</th><th>Capacitance Change</th></tr><tr><td>B</td><td>Within ±10%</td></tr><tr><td>E, F</td><td>Within ±20%</td></tr><tr><td>SL</td><td>Within ± 5%</td></tr></table>	Char.	Capacitance Change	B	Within ±10%	E, F	Within ±20%	SL	Within ± 5%																						
Char.	Capacitance Change																														
B	Within ±10%																														
E, F	Within ±20%																														
SL	Within ± 5%																														
D.F. Q	<table><tr><th>Char.</th><th>Specifications</th></tr><tr><td>B, E</td><td>D.F. ≤5.0%</td></tr><tr><td>F</td><td>D.F. ≤7.5%</td></tr><tr><td>SL</td><td>Q ≥ 275+5/2C*¹ (C < 30pF) Q ≥ 350 (C ≥ 30pF)</td></tr></table>	Char.	Specifications	B, E	D.F. ≤5.0%	F	D.F. ≤7.5%	SL	Q ≥ 275+5/2C* ¹ (C < 30pF) Q ≥ 350 (C ≥ 30pF)																						
Char.	Specifications																														
B, E	D.F. ≤5.0%																														
F	D.F. ≤7.5%																														
SL	Q ≥ 275+5/2C* ¹ (C < 30pF) Q ≥ 350 (C ≥ 30pF)																														
I.R.	3000MΩ min.																														
Dielectric Strength	Per Item 6																														

*¹ "C" expresses nominal capacitance value (pF).

*² "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa