


Specifications:

connector description (1)	dc plug, 5.5x2.5xL23 mm, molding style, spring contacts, P/N 50-00026
overmold (2,5)	30P, PVC, black
connector description (6)	dc jack, 5.5x2.5xL17.4 mm, molding style, P/N 50-00027
wire description (3)	2C, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 48P, P/N 30-00007
cable outer diameter	Ø4.4 mm
cable color	black
cable length	1830 +76/-25 mm
twist tie (4)	black
rating	3 A, 36 Vdc

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT  
RoHS compliant  
Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Mechanical drawing:

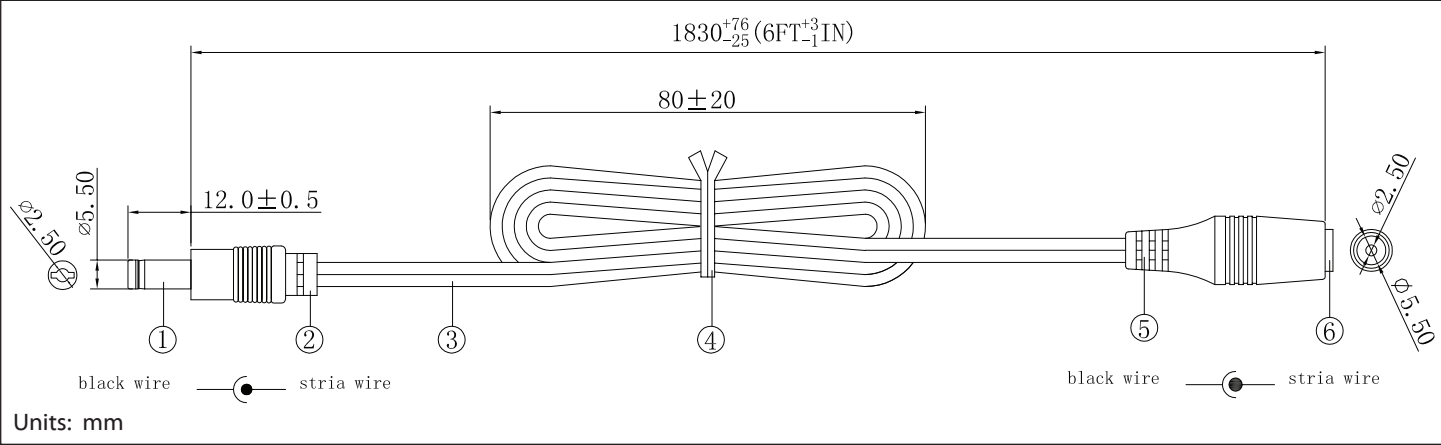

tolerance X:  $\pm 0.5$  mm .X:  $\pm 0.3$  mm .XX:  $\pm 0.05$  mm  
applicable unless otherwise indicated in specification or on drawings  
Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial	Date
---------	------

**Revision notes:**

Rev	Date	Description
A	January 19, 2009	Re-issued; original specification issued by CUI, re-issued by Tensility without any material or mechanical changes.
A1	April 26, 2011	added testing information to notes
A2	August 31, 2011	updated description, connector, and wire information
A3	September 10, 2013	updated connector
A4	September 26, 2013	updated connectors

<b>Prepared:</b>	<b>Verified:</b>

**Specification Approval**

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature \_\_\_\_\_

Title \_\_\_\_\_

Name \_\_\_\_\_

Date \_\_\_\_\_

Company \_\_\_\_\_

Branch \_\_\_\_\_