

Circuit Board Hardware


A

CBMFTS


CBMFTS

Metric Male-Female Threaded Standoff

NEW

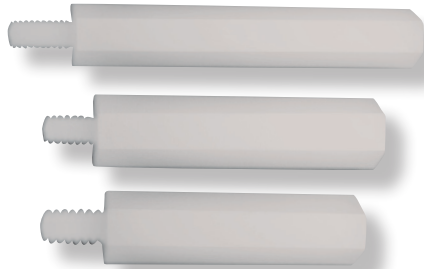

- Once standoff is mounted with screws it becomes a sturdy and robust support
- Easy to assemble or remove during installation or repair





Standard Pack: 1,000 per bag				
Material: Nylon 6/6				
Color: Natural				
Part No	Thread	“A” Standoff Height mm	“B” mm	Across Flats mm
CBMFTS205A	M3	5	3	5.5
CBMFTS210A		6	4	
CBMFTS215A		7	5	
CBMFTS220A		7.5		
CBMFTS225A		8	6	
CBMFTS230A		9		
CBMFTS235A		10		
CBMFTS240A		10.5		
CBMFTS245A		11		
CBMFTS250A		12		
CBMFTS255A		12.7		
CBMFTS260A		13		
CBMFTS265A		14		
CBMFTS270A		15		
CBMFTS275A		16		
CBMFTS280A		16.5		
CBMFTS285A		17		
CBMFTS290A		18		
CBMFTS295A		18.5		
CBMFTS300A		19		
CBMFTS305A		20		
CBMFTS310A		21		
CBMFTS315A		22		
CBMFTS320A		24.5		
CBMFTS325A		25		
CBMFTS330A		27		
CBMFTS335A		30		
CBMFTS340A		33		
CBMFTS345A		35		

BTS

BTS

Brass Male-Female Threaded Standoff

NEW

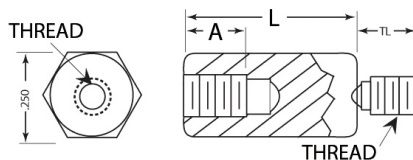

- Provides an electrical connection between the PCB and the chassis
- Sturdy and robust

Material: Brass with Nickel Plating					
Part No	Thread	"L" Standoff Height	"TL"	"A"	Standard Pack
BTS005A	#4-40	.250 (6.4)	.187 (4.7)	.200 (5.1)	500
BTS010A		.375 (9.5)			
BTS015A		.500 (12.7)			
BTS020A		.625 (15.9)			
BTS025A		.750 (19.1)			
BTS030A		.875 (22.2)		.250 (6.4)	250
BTS035A		1.000 (25.4)			
BTS040A		1.250 (31.8)			
BTS045A		1.500 (38.1)			
BTS105A		.250 (6.4)			
BTS110A	#6-32	.375 (9.5)	.250 (6.4)	.200 (5.1)	500
BTS115A		.500 (12.7)			
BTS120A		.625 (15.9)			
BTS125A		.750 (19.1)			
BTS130A		.875 (22.2)		.375 (9.5)	250
BTS135A		1.000 (25.4)			
BTS140A		1.250 (31.8)			
BTS145A		1.500 (38.1)			
BTS205A		.250 (6.4)			
BTS210A		.375 (9.5)			
BTS215A	#8-32	.500 (12.7)	.375 (9.5)	.200 (5.1)	500
BTS220A		.625 (15.9)			
BTS225A		.750 (19.1)			
BTS230A		.875 (22.2)		.375 (9.5)	250
BTS235A		1.000 (25.4)			
BTS240A		1.250 (31.8)			
BTS245A		1.500 (38.1)			