


Leaded Common Mode Choke Coils for DC and Signal lines

CM08RB03

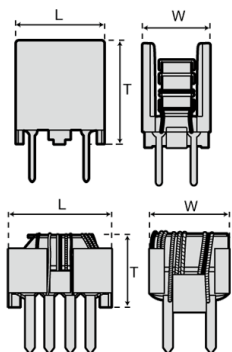

■ Features

- Item Summary
2A, Leaded
- Lifecycle Stage
Non-preferred
- Standard packaging quantity (minimum)
Bulk 500pcs


■ Products characteristics table

| | |
|--------------------------------|-----------------------|
| External Dimensions | 13.5(max) × 12(max)mm |
| Impedance | 1000Ω |
| Impedance Measuring Frequency | 50MHz |
| Inductance | 15 μH(- to -) |
| Inductance Measuring Frequency | 1kHz |
| DC Resistance (max) | 0.05 Ω |
| Rated Current | 2A |
| Resistance | 100MΩ min. |
| RoHS Compliance | Yes |
| Soldering Method | Wave |

■ External Dimensions

| | |
|---|------------|
| L | 13.5mm max |
| W | 12mm max |
| T | 11.5mm max |

■ Typical Characteristics Fig.

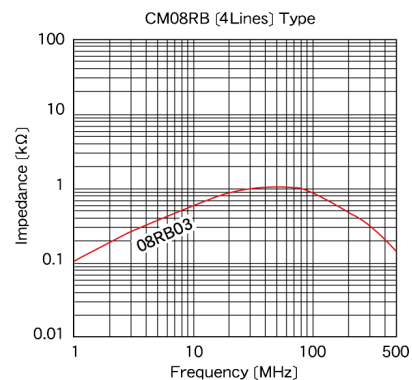

2013.11.01

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.