

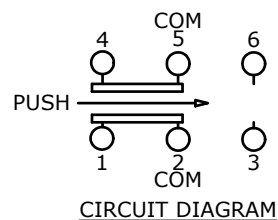
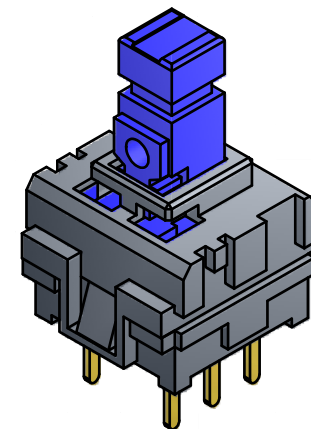
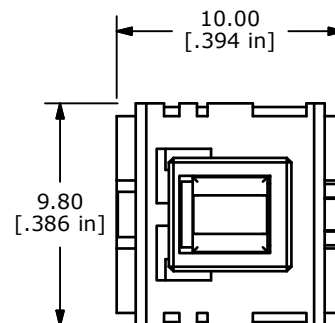
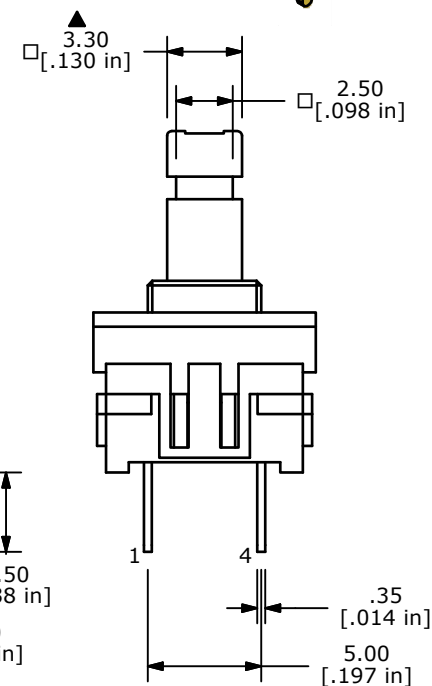


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-1, 5-4	2-3, 5-6

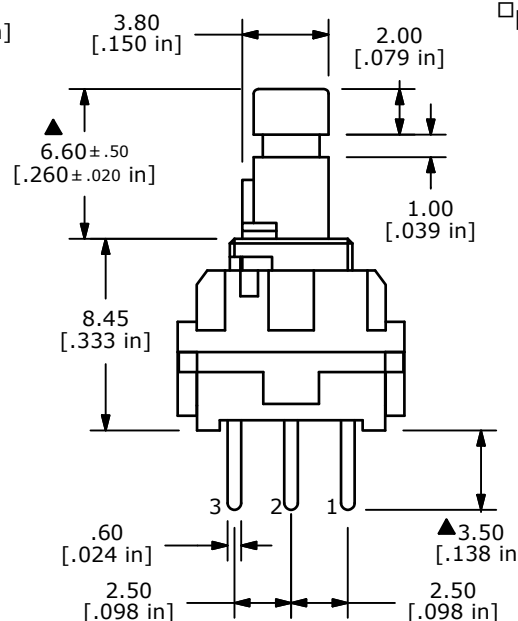

HOLE USED TO
IDENTIFY TERMINALS

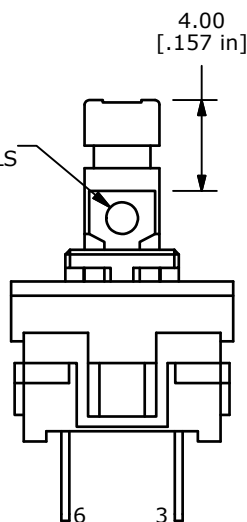

NOTE:

1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: x.x = ±0.4
x.xx = ±0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. CONTACT RATING: 0.1A @ 30 VDC
5. TRAVEL: FULL= 1.8mm; LOCKING= 1.2mm
- ▲ 6. OPERATING FORCE: 200±80gf
7. ELECTRICAL LIFE: 10,000 CYCLES
8. CONTACT RESISTANCE: 30mΩ MAX.
9. ▲ DENOTES CRITICAL PARAMETER
10. CONTACT MATERIAL: SILVER
11. 2002/95/EC (RoHS) COMPLIANT



TITLE JN2UEENAGX

C	20102	DRAWING UPDATE / CLEAN-UP	8/18/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
3:1	8/18/2011	BGL	D300001	C