



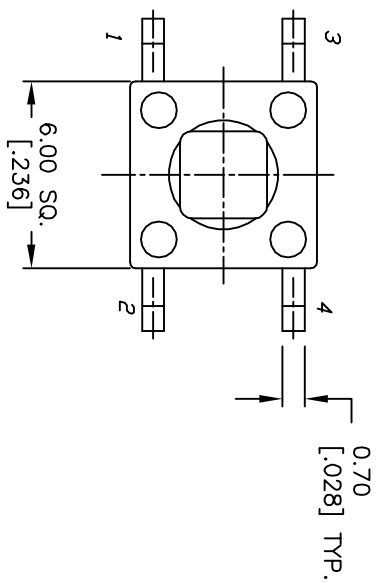


RECOMMENDED MOUNTING PAD



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
- ▲5. CONTACT MATERIAL: GOLD DOME (D990006)
- ▲6. OPERATING FORCE: 100±50gf
7. TRAVEL: 0.25±0.1mm
8. CONTACT RESISTANCE: 100 mΩ @ Max.
9. ELECTRICAL LIFE: 100,000 CYCLES min.
- ▲10. DESIGNATE MAJOR FEATURE:
- ▲11. BODY & STEM: HIGH TEMP. PLASTIC -PPS RYTON-R-4
- ▲12. PACKAGED: TAPE & REEL, 700 PCS PER REEL 
13. 2002/95/EC (ROHS) COMPLIANT.
14. REEL WIDTH: 16.0mm 

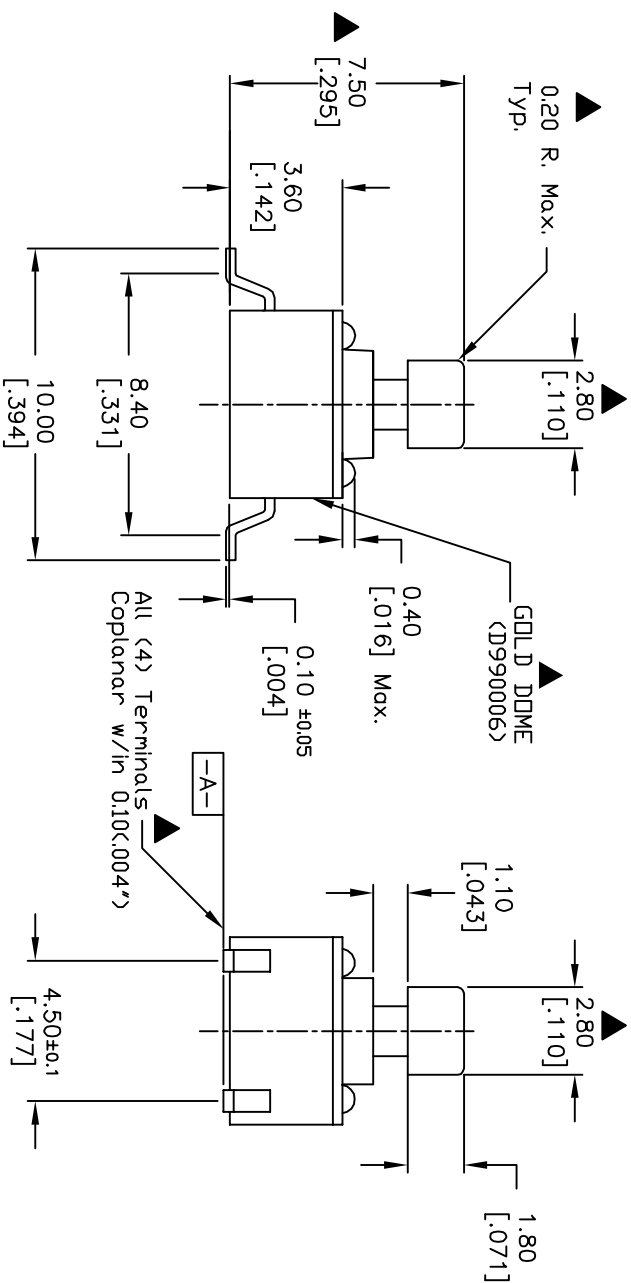

				 E-SWITCH®		 LAMB INDUSTRIES	
TITLE				TL 3301SPF100RG			
SCALE		DATE		DR		DWG	
4:1		3/12/02		CJB		D310803	
REV				REV			
C				C			