

MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.		
System	Band I Duplexer	Date	March 31, 2010	
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg		

Table 1. Electrical Specification


Item		Condition	Sp	oecificati	on	1114	Danada	
		(MHz)	Min	Тур	Max	Unit	Remarks	
Tx	Insertion los	s	1920~1980	-	1.4	1.65	dB(*1)	
to	Ripple		1920~1980	-	0.4	0.8	dB	
ANT	VSWR	Ant	1020 1000	-	1.4	2.0		
		Tx	1920~1980	-	1.6	2.0	-	
	Input Power		1920~1980		Bm, +50 50kh, CV	•	dBm	
	Absolute atte	enuation	1570~1580	30	32	-	dB	
			2110~2170	40	43	-	dB	
			2400~2500	28	33	-	dB	
			3840~3960	10	17	-	dB	
			5760~5940	5	13	-	dB	
ANT	Insertion los	S	2110~2170	-	1.7	2.0	dB(*1)	
to	Ripple		2110~2170	-	0.4	1.0	dB	
Rx	VSWR	Ant	2110~2170	-	1.5	2.0		
		Rx	2110~2170	-	1.6	2.0	-	
	Absolute atte	enuation	1920~1980	48	52	-	dB	
			2400~2500	27	33	-	dB	
Tx to	11-4:		1920~1980	51	54	-	dB	
Rx	Rx Isolation		2110~2170	43	47	-	dB	
Terminating Impedance		Tx port		50		Ohm	Single-ended	
			Rx port		50		Ohm	Single-ended
			Ant port	5	50//2.7nl	Н	Ohm	Single-ended
Operatin	Operating Temperature			-:	20 to +8	5	°C	
Device s	ize (L typ. x W	typ. x H m	ax.)	2.5	x 2.0 x (0.65	mm	

^(*1) Specification of insertion loss excludes loss that comes from the test board. (Approximately 0.15dB)



Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.		
System	Band I Duplexer	Date	March 31, 2010	
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg		

Dimensions

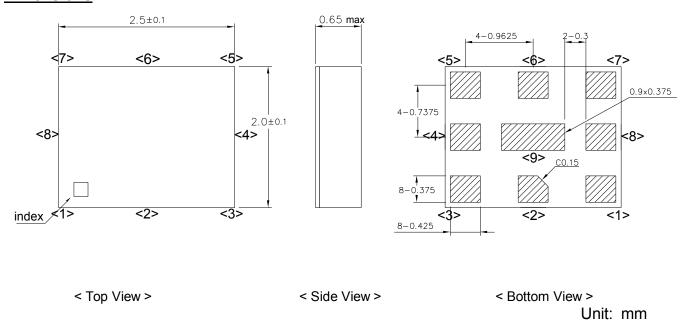

Pin Configuration

Pin No.	Pin name	Description
1	Rx	Receiver Pin
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	GND	Ground Pin
9	GND	Ground Pin


Figure 1. Dimensions and Pin assignment





Customer Name	Standard	TAIYO YUDEN Mobile Technology Co., Ltd.		
System	Band I Duplexer	Date	March 31, 2010	
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg		

Evaluation Circuit

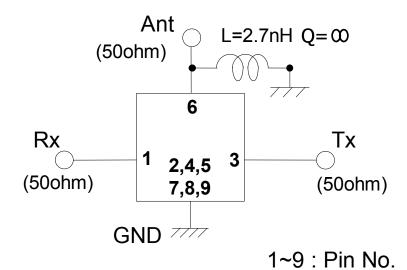

Recommended foot print pattern

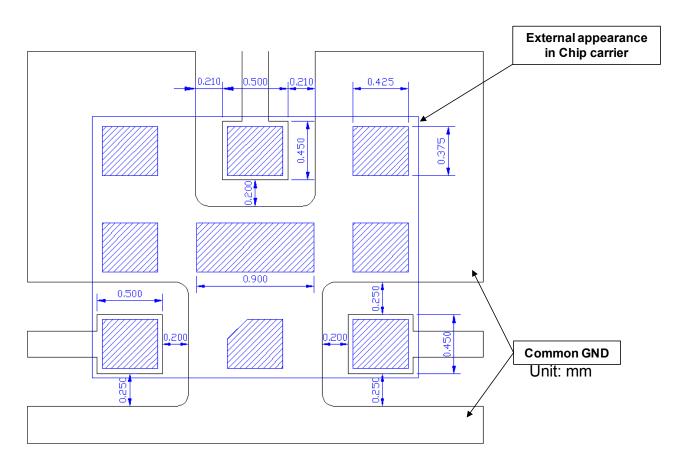


Figure 2. Recommended foot print pattern

Tx to Ant





Customer Name	Standard	TAIYO YUDEN Mobile	Technology Co.,Ltd.
System	Band I Duplexer	Date	March 31, 2010
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg	



Ant to Rx

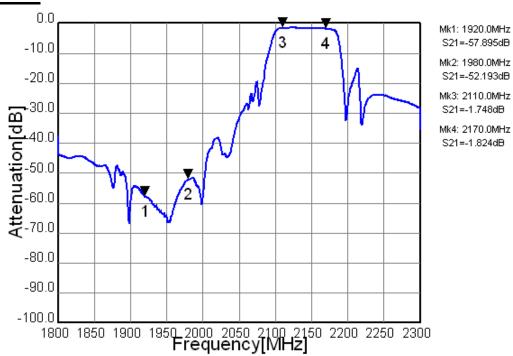


Figure 3-1. Electrical Characteristics


These data include loss that comes from the test board. (Approximately 0.15dB)





Customer Name	Standard	TAIYO YUDEN Mobile	Technology Co.,Ltd.
System	Band I Duplexer	Date	March 31, 2010
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg	

Tx to Ant, Ant to Rx

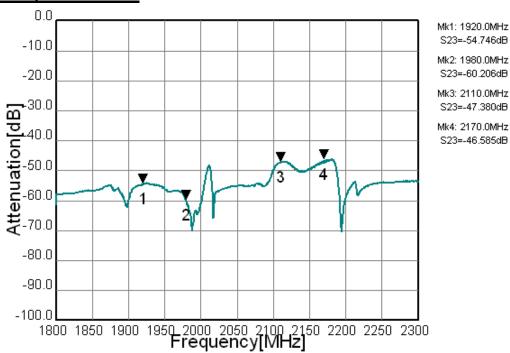

Tx to Rx Isolation

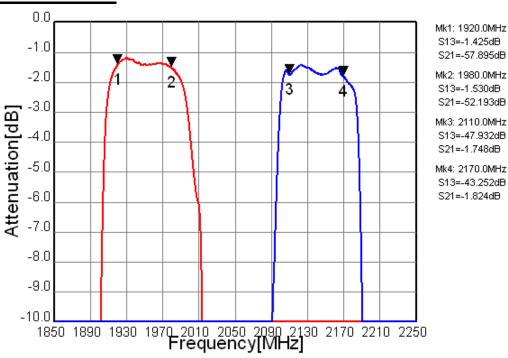



Figure 3-2. Electrical Characteristics

These data include loss that comes from the test board. (Approximately 0.15dB)



Customer Name	Standard	TAIYO YUDEN Mobile	Technology Co.,Ltd.
System	Band I Duplexer	Date	March 31, 2010
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg	

Tx Port

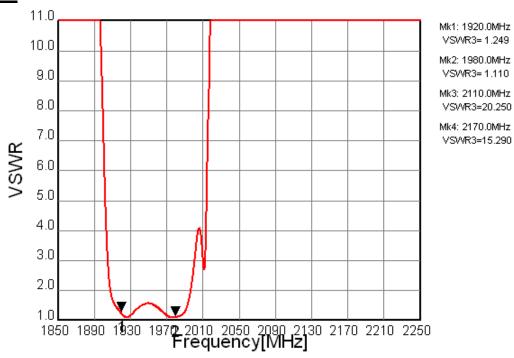

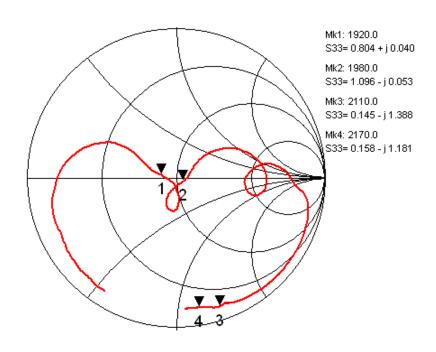


Figure 3-3. Electrical Characteristics






MSL1

Customer Name	Standard	TAIYO YUDEN Mobile Technology Co.,Ltd.		
System	Band I Duplexer	Date	March 31, 2010	
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg		

Rx Port

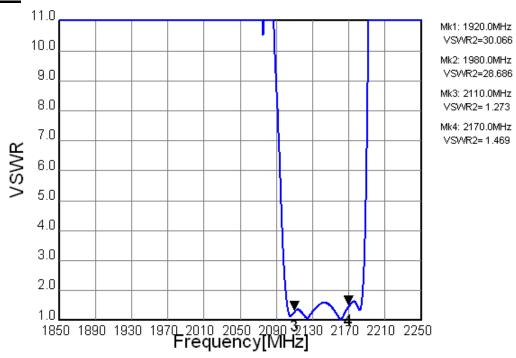

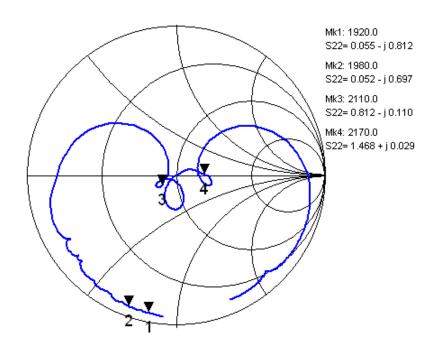



Figure 3-4. Electrical Characteristics





Customer Name	Standard	TAIYO YUDEN Mobile	Technology Co.,Ltd.
System	Band I Duplexer	Date	March 31, 2010
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg	

Ant Port

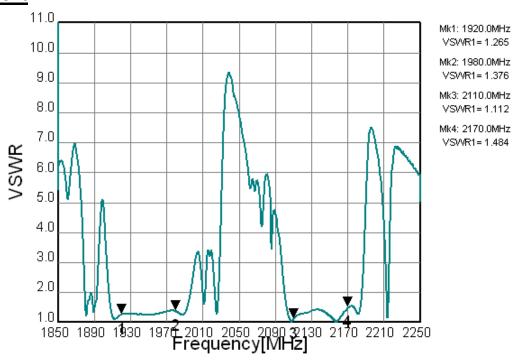

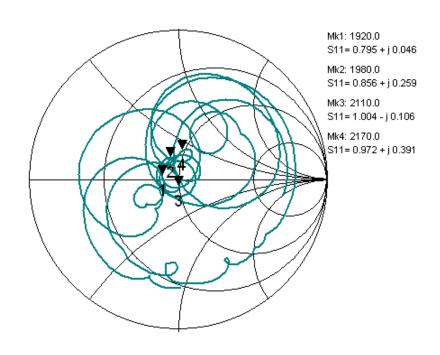



Figure 3-5. Electrical Characteristics





Customer Name	Standard	TAIYO YUDEN Mobile Technology Co., Ltd.		
System	Band I Duplexer	Date	March 31, 2010	
Part Number	FAR-D6JG-2G1400-D3FZ	Version 4.0fg		

Tx to Ant (Wide span)

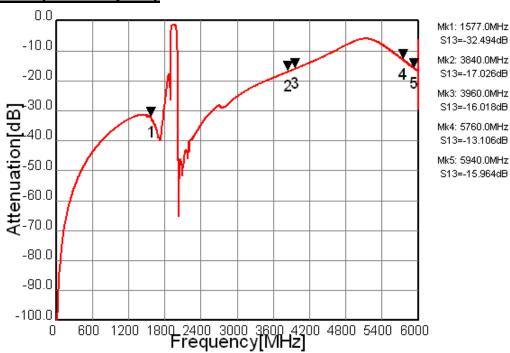

Ant to Rx (Wide span)

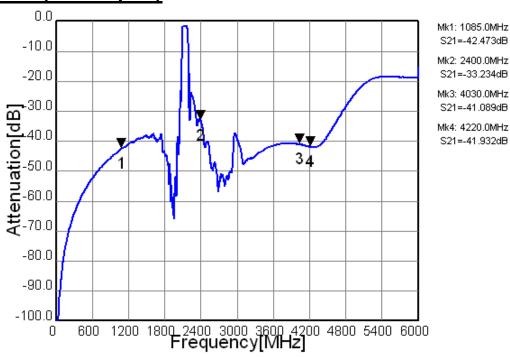


Figure 3-6. Electrical Characteristics

