

Specification Status: Released

Maximum Electrical Rating

Voltage: 6.0V_{DC}

Short Circuit Current: 100A

Notes:

1. All terminations are Tin plated.
2. Drawing not to scale

Marking:

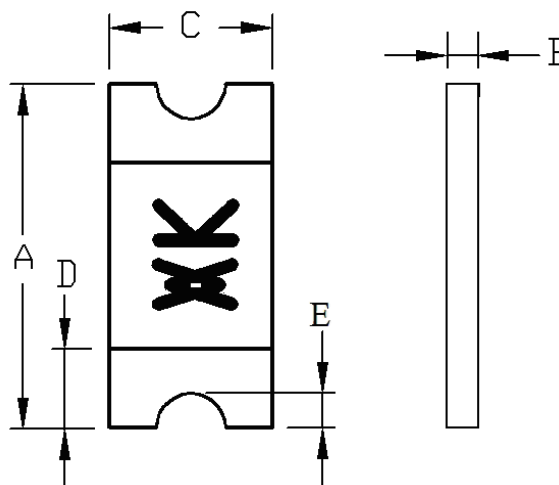
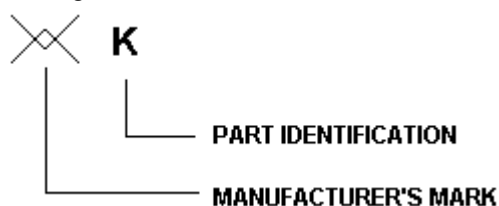


TABLE I. DIMENSIONS:

| | A | | B | | C | | D | | E |
|-----|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| mm: | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN |
| in: | 3.00 | 3.4 | 0.28 | 0.67 | 1.37 | 1.80 | 0.25 | 0.75 | 0.076 |
| | (0.118) | (0.134) | (0.011) | (0.026) | (0.054) | (0.071) | (0.010) | (0.030) | (0.003) |

TABLE II. PERFORMANCE RATINGS:

| CURRENT RATINGS** | | | | | | TIME TO TRIP ** | RESISTANCE VALUES | | TRIPPED-STATE POWER DISSIPATION** |
|-------------------|------|-----------------|------|-----------------|------|---------------------------|-------------------|------|-----------------------------------|
| AMPERES AT 0°C | | AMPERES AT 20°C | | AMPERES AT 60°C | | SECONDS AT 20°C, 8.0A MAX | OHMS AT 20°C | | WATTS AT 20°C, 6.0V MAX |
| HOLD | TRIP | HOLD | TRIP | HOLD | TRIP | | MIN | MAX* | |
| 1.3 | 2.6 | 1.10 | 2.20 | 0.8 | 1.6 | 0.1 | 0.07 | 0.20 | 0.8 |

*Maximum resistance is measured 1 hour after reflow.

** Values specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Agency Recognitions: UL, CSA, TÜV

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free



Halogen Free*



* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm