

DE1E3KX152MA4BL01

“ # ” indicates a package specification code.


Available

Flow OK

Complies with RoHS

< List of part numbers with package codes >
DE1E3KX152MA4BL01

Shape

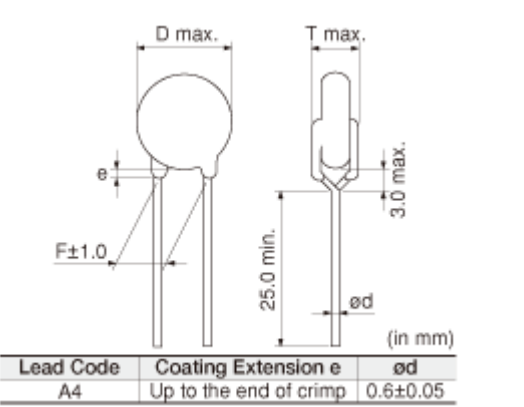

| Lead Code | Coating Extension e | ød |
|-----------|------------------------|----------|
| A4 | Up to the end of crimp | 0.6±0.05 |

| | |
|---------------------------------|------------------------|
| L size or outer diameter D (mm) | 8.0 mm max. |
| T size | 7.0 mm max. |
| Lead spacing F | 10.0 ± 1.0mm |
| Lead diameter d | 0.6 ± 0.05mm |
| Paint dripping e | Up to the end of crimp |

Notes

X1/Y1 Class Certified Products

References

| Packaging | Specifications | Minimum quantity |
|-----------|-----------------|------------------|
| B | Packing in bulk | 250 |

Specifications

| | |
|--|----------------|
| Capacitance | 1500pF ± 20% |
| Rated voltage | 250Vac(r.m.s.) |
| Temperature characteristics (complied standard) | E(JIS) |
| Capacitance change rate | +20/-55% |
| Temperature range of temperature characteristics | -25 to 85 |
| Operating temperature range | -25 to 125 |

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ’ s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.