


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

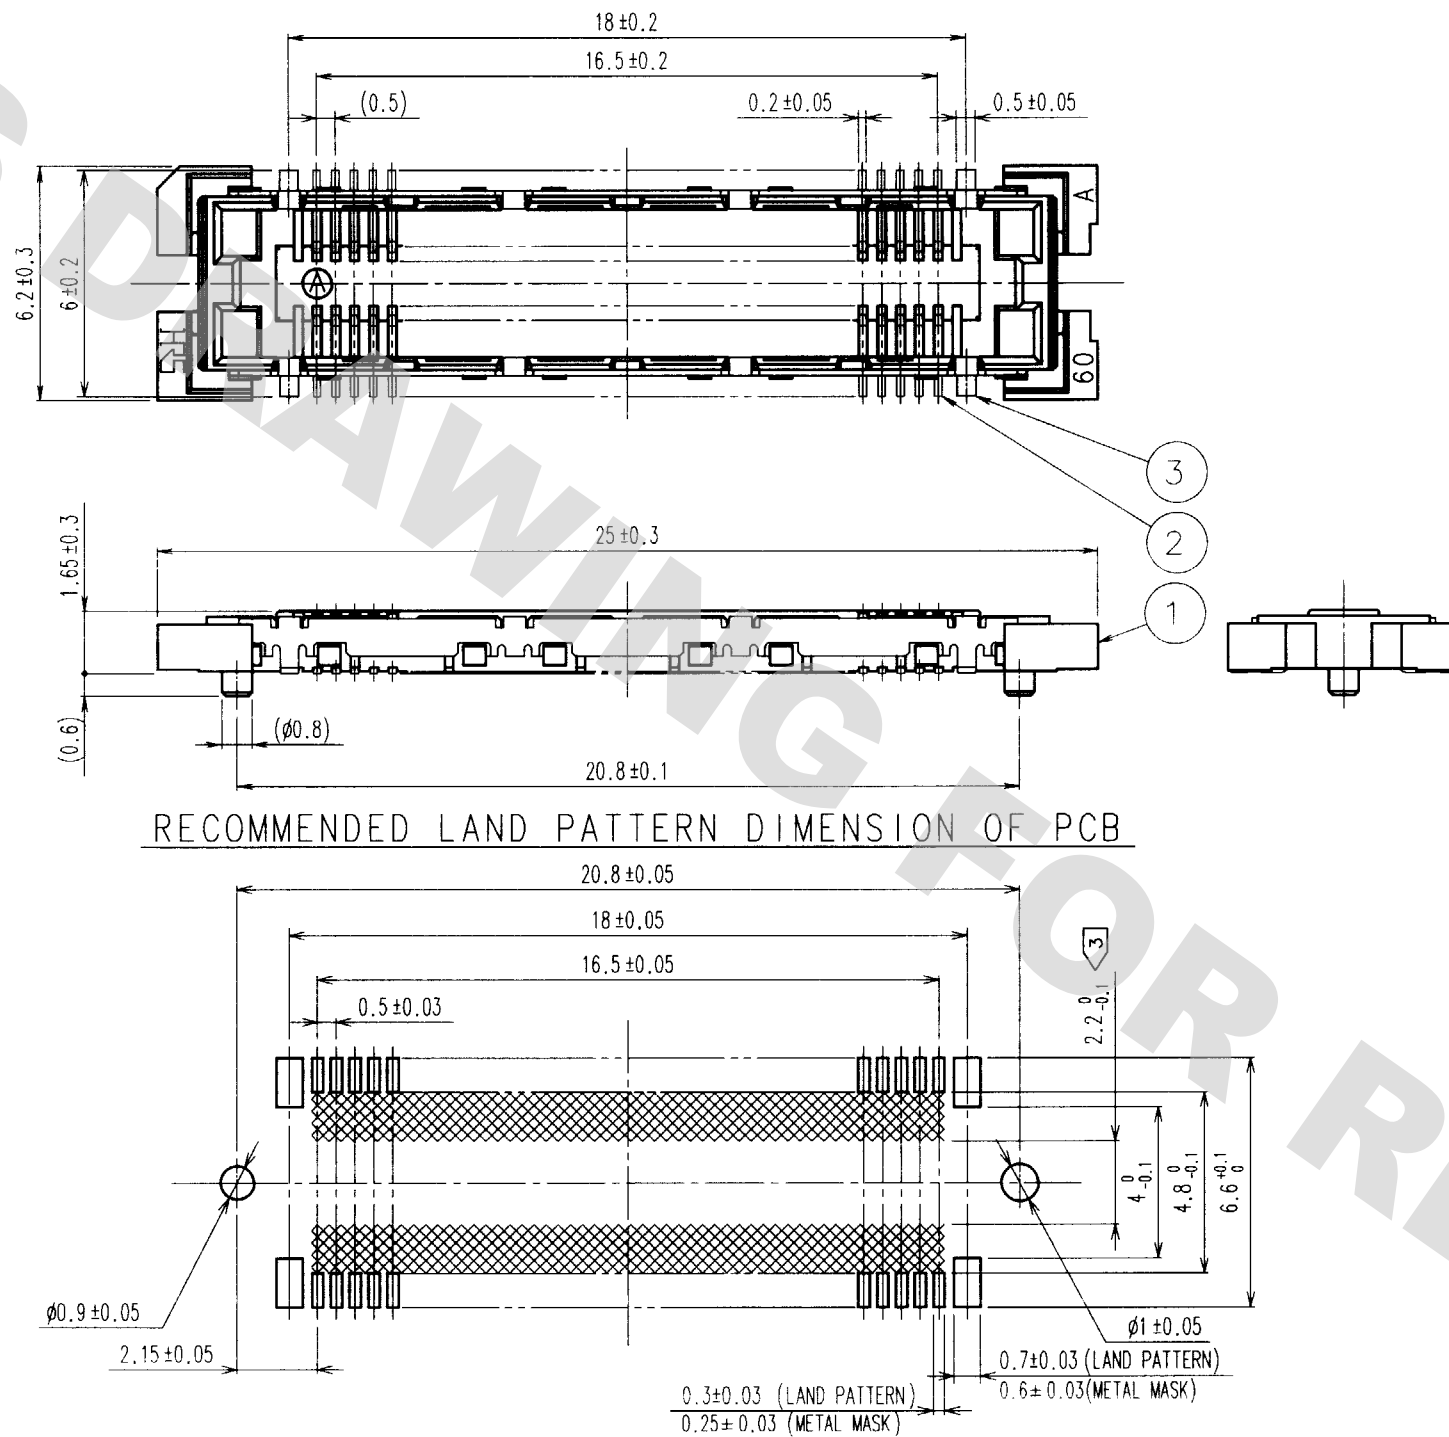

RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD ($0.1\mu\text{m}$) OVER NICKEL							
		LEAD: GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED			
SCALE	5 : 1	DRAWING NO.	EDC3-152116-02	PART NO.	FX11LA-68S-SV (22)				
UNITS	mm	HRS	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL573-0142-6-22	1/2			

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

