


EPM75SB275 Datasheet

Technical Specifications

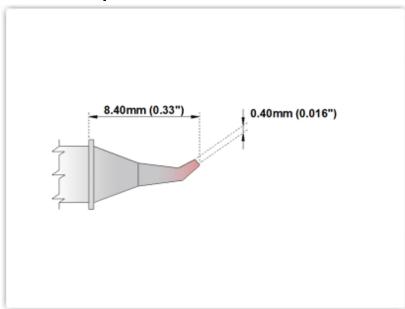

EPM75SB275

Bent Sharp 30° 0.4mm (0.016")

Tip Style: Bent Sharp 30° Tip Width: 0.40mm (0.016") Tip Length: 8.40mm (0.33")

75 Type Cartridge¹: 350°C - 398°C

RoHS Compliant² / Lead Free: YES

Equivalent to: SFP-CNB04

For Use With: EB-2000S, MFR-PS1100, MFR-PS2200, MFR-PS1K, MFR-PS2K

Material Composition



technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

Sold€r

Easy Braid Co. tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Easy Braid Co. offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method,

² Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.