


## Leaded Ferrite Bead Inductors

FBR05VA121SA-00

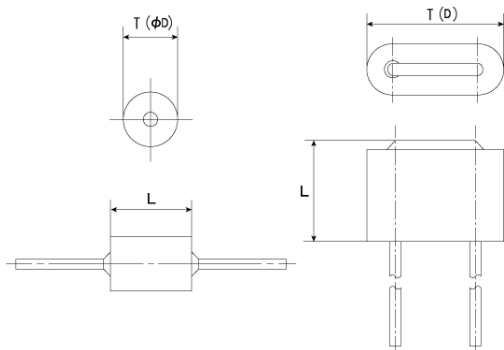

## ■ Features

- Item Summary  
120 $\Omega$ , 7A, Leaded
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping 2000pcs


## ■ Products characteristics table

External Dimensions	7.5(-) × 5(max)mm
Impedance (max)	120 $\Omega$
Impedance Measuring Frequency	100MHz
Rated Current	7A
DC Resistance (max)	0.01 $\Omega$
Temperature Range	-25°C to 85°C
Resistance	1M $\Omega$ min.
RoHS Compliance	Yes
Soldering Method	Wave

## ■ External Dimensions

L	7.5mm -
T	5mm max

## ■ Typical Characteristics Fig.

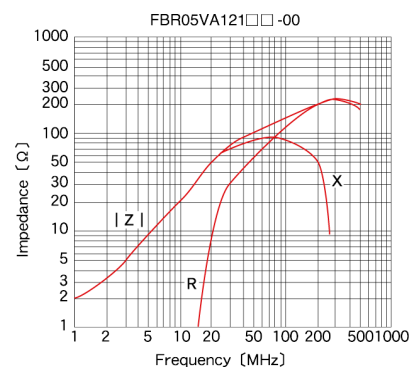

2013.11.01

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
 Before making final selection, please check product specification.