

ECCOSORB® FGM

Thin, Flexible, Impervious, Broadband Absorbers

Material Characteristics

- Thin, flexible, broadband, magnetically loaded, silicone absorber sheets
- Flame resistant and impervious to moisture
- Does not support fungal growth per MIL-STD-810E
- Low out-gassing properties for space applications
- Can be subjected to high altitudes, including space with no adverse effects
- Can be readily cut with a sharp knife
- Conforms to contoured surfaces and can be bonded to metallic or non-metallic structures

Applications

- ECCOSORB® FGM is used to line cavities in which antennas operate. It may be applied to surfaces to improve radar performance, reduce radar cross section or backscattering.
- ECCOSORB® FGM is effective even at high power in reducing specular reflections and surface currents

Availability


- Standard sheets are 12" x 12" (30.5cm x 30.5cm)
- On request ECCOSORB® FGM can be supplied with a Pressure Sensitive Adhesive (PSA) designated ECCOSORB® FGM-XX/SS6M
- ECCOSORB® FGM is available in other sizes and customer specified configurations

Typical Properties

	FGM-40	FGM-125
Frequency Range (GHz)	4-10	2-12
Average Reflectivity (dB)	-10	-12
Service Temperature, °F (°C)	350 (177)	
Short Time Service Temp., °F (°C)	500 (260)	
Weight, lb/ft ² (kg/m ²)	1.0 (4.9)	2.2 (10.7)
Density, lb/ft ³ (g/cm ³)	318 (5.2)	200 (3.2)
%TML (with SS6M)	0.16 (0.20)	0.31 (0.23)
%CVCM (with SS6M)	0.06 (0.03)	0.10 (0.06)

Instructions for Use

- To obtain low reflectivity, the absorbers must be mounted on a metal surface
- To bond ECCOSORB® FGM without a PSA, use STYCAST® 4952. Primer S-11 should also be used prior to the adhesives application
- To ensure a strong bond, the metallic surface should be thoroughly cleaned with a solvent to remove any oil, grease, or dusts
- Apply a thin coat of Primer S-11 to the metal and allow to dry. Coverage is 147 ft²/lb per 1 mil thickness
- Apply a thin coat of STYCAST® 4952 two-part RTV silicone over the primer.
- Firmly press ECCOSORB® FGM into place and hold until cure is complete

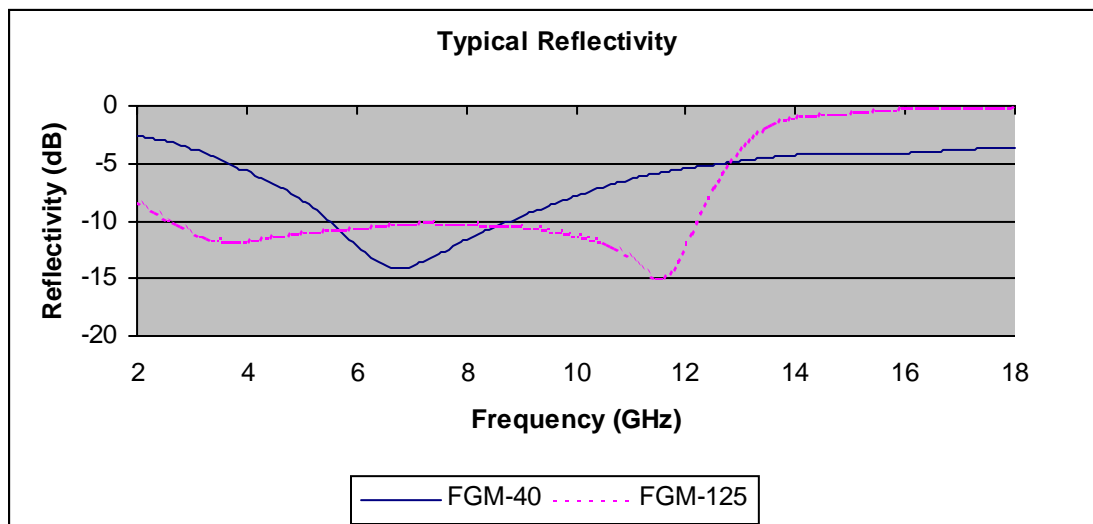

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.