

A latching RF reed relay designed for manpack, portable HF radio systems, from 1-30MHz, where power resources are limited and board space is at a premium. These relays have separate set and reset coils to simplify board design, are capable of carrying up to 1.5A current at 30MHz and can withstand either 1.5, 3 or 3.5kV between contacts. The FRS22012 is a fast latching relay with RF and magnetic screening, that enables switching with coil pulse lengths down to 0.5ms.




- **Bistable Latching Relay**
- **0.5 Coil Pulse length**
- **3.5kV DC Isolation**
- **1.5A Carry Current**
- **RF & Magnetic Screening**
- **Approved to MIL standards for Bump, Shock and Vibration**

Contact	Units	Conditions	FRS22012	SLR305SD01	SLR305SD02
Action (form A, B or Latching)			Latching		
Switching Voltage	V	DC max	20		
Switching Current	A	DC max	0.5		
Carry Current	A	RMS at 30MHz	1.5		
Isolation	kV	DC max	3.5	1.5	3.0
Capacitance	pF	coil/screen gnd	0.2	<1	<1
Contact Connections		pin number	3 & 4		
Lifetime	operations	dry switching	10 ⁹		
Contact Resistance	mOhms	maximum (typical)	80 (30)		
Insulation Resistance	Ohms	minimum (typical)	10 ¹⁰ (10 ¹³)		
ESR at 1.5A, 30MHz	mOhms	typical	400		
Coil At 20°C					
Nom. Working Voltage	VDC		12	5	5
Min. pulse length	ms	Minimum	0.5	2	2
Operate time	ms	diode ftted	0.5	2	2
Nominal Resistance	ohms	+/-10%	500	300	300
RF Screening			Part	No	No
RF Screening Connection		pin number	7		
Coil Connections	Set	pin number	5 & 6(+)		
	Reset	pin number	1 & 2(+)		
Relay					
Isolation contact to coil/screen	kV	DC max	4		
Capacitance contact to all other terminals	pF	contacts open	2.5		
Capacitance contact to all other terminals	pF	contacts closed	4.0	3	3
Environmental					
Operating temperature range	°C		-40 to +85		
Storage temperature range	°C		-40 to +125		
Weight	gm		11	7	7

Mechanical Dimensions

All dimensions are in millimeters (inches)





FRS22012

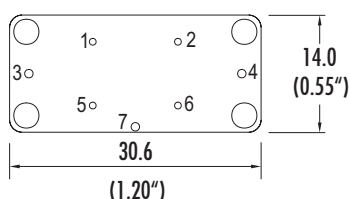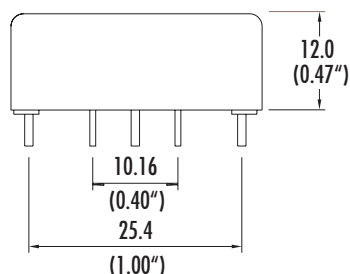

PIN SIZE

PINS 3 & 4	1.0 (0.039") dia.
PINS 1, 2, 5 & 6	0.7 (0.026") dia.
PIN 7	1.0 x 1.0 Square (0.039")

SLR3 series

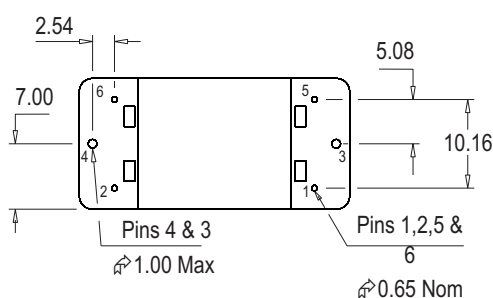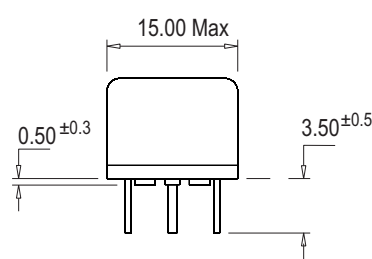

All dimensions in millimeters, with a tolerance of ± 0.20 mm unless otherwise stated.

ISO9001 Certified

USA
Sales & Tech Support (866) 258-5057
Email: sales@cynergy3.com
Cynergy3 Components
11125 Knott Avenue, Suite D
Cypress
California 90630
USA

EUROPE - UK
Telephone +44 (0) 1202 897969
Fax +44 (0) 1202 891918
Email: sales@cynergy3.com
Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE