

## MOS FET Relays


## G3VM-41BR/ER

**Higher Power, 3.5A switching with a 40V load, DIP package. Low 30 mΩ ON Resistance.**

- Continuous load current of 3.5A (Connection C: 7A)
- Switches minute analog signals
- Dielectric strength of 2,500 Vrms between I/O
- RoHS Compliant

### ■ Application Examples

- Communication equipment and Measurement devices
- Security systems and Power circuits
- Factory Automation equipment

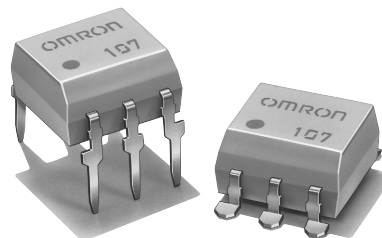

**NEW**

**Note:** The actual product is marked differently from the image shown here.

### ■ List of Models


Package Type	Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
DIP6	SPST-NO	PCB terminals	40 V	G3VM-41BR	50	---
		Surface-mounting terminals		G3VM-41ER		
				G3VM-41ER(TR)	---	1,500

**Note:** The AC peak and DC value are given for the load voltage.


### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

#### G3VM-41BR

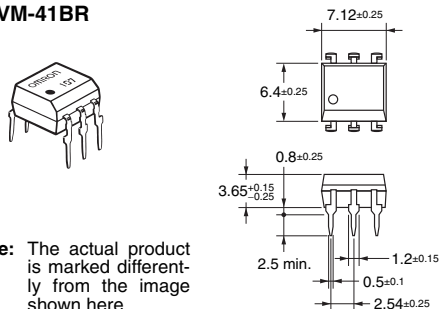


#### G3VM-41ER


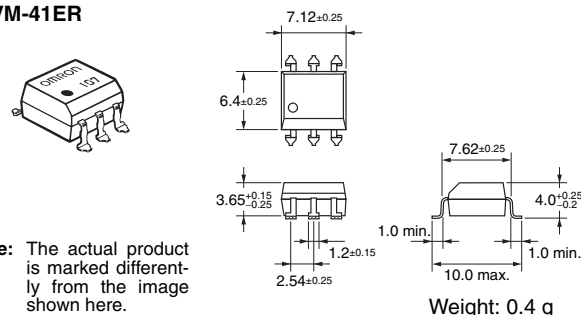


### ■ Terminal Arrangement/Internal Connections (Top View)

#### G3VM-41BR




#### G3VM-41ER

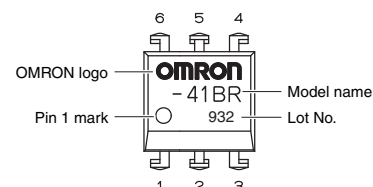

**Note:** The actual product is marked differently from the image shown here.


### ■ PCB Dimensions (Bottom View)

#### G3VM-41BR



### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-41ER




## Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current		I <sub>F</sub>	30	mA	
	Repetitive peak LED forward current		I <sub>FP</sub>	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate		Δ I <sub>F</sub> /°C	−0.3	mA/°C	T <sub>a</sub> ≥ 25°C
	LED reverse voltage		V <sub>R</sub>	5	V	
	Connection temperature		T <sub>j</sub>	125	°C	
Output	Load voltage (AC peak/DC)		V <sub>OFF</sub>	40	V	
	Continuous load current	Connection A	I <sub>O</sub>	3.5	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B		3.5		
		Connection C		7		
	ON current reduction rate	Connection A	Δ I <sub>O</sub> /°C	−35	mA/°C	T <sub>a</sub> ≥ 25°C
		Connection B		−35		
		Connection C		−70		
	Pulse on current		I <sub>OP</sub>	10.5	A	t=100 ms, Duty = 1/10
	Connection temperature		T <sub>j</sub>	125	°C	
Dielectric strength between input and output (See note 1.)		V <sub>I-O</sub>	2,500	V <sub>rms</sub>	AC for 1 min	
Operating temperature		T <sub>a</sub>	−40 to +85	°C	With no icing or condensation	
Storage temperature		T <sub>stg</sub>	−55 to +125	°C	With no icing or condensation	
Soldering temperature (10 s)		---	260	°C	10 s	

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

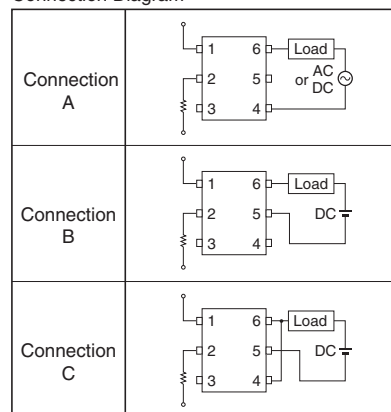

## Electrical Characteristics (Ta = 25°C)

Item		Symbol	Mini- mum	Typical	Maxi- mum	Unit	Measurement conditions	
Input	LED forward voltage	V <sub>F</sub>	1.18	1.33	1.48	V	I <sub>F</sub> = 10 mA	
	Reverse current	I <sub>R</sub>	---	---	10	μA	V <sub>R</sub> = 5 V	
	Capacity between terminals	C <sub>T</sub>	---	70	---	pF	V = 0, f = 1 MHz	
	Trigger LED forward current	I <sub>FT</sub>	---	0.5	3	mA	I <sub>O</sub> = 1 A	
Output	Maximum resistance with output ON	Connection A	R <sub>ON</sub>	---	30	60	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 2 A, t < 1 s
		Connection B		---	15	---	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 2 A, t < 1 s
		Connection C		---	8	---	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 4 A, t < 1 s
	Current leakage when the relay is open	I <sub>LEAK</sub>	---	---	1.0	μA	V <sub>OFF</sub> = 40 V	
	Capacity between terminals	C <sub>OFF</sub>	---	1,000	---	pF	V = 0, f = 1 MHz	
Capacity between I/O terminals		C <sub>I-O</sub>	---	0.8	---	pF	f = 1 MHz, V <sub>s</sub> = 0 V	
Insulation resistance between I/O terminals		R <sub>I-O</sub>	1,000	---	---	MΩ	V <sub>I-O</sub> = 500 VDC, R <sub>oh</sub> ≤ 60%	
Turn-ON time		t <sub>ON</sub>	---	2.0	5.0	ms	I <sub>F</sub> = 5 mA, R <sub>L</sub> = 200 Ω, V <sub>DD</sub> = 20 V (See note 2.)	
Turn-OFF time		t <sub>OFF</sub>	---	0.1	1.0	ms		

**Note:** 2. Turn-ON and Turn-OFF Times









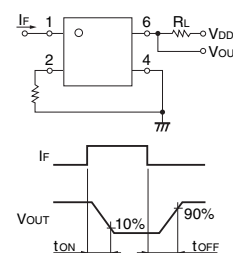


## Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	---	---	32	V
Operating LED forward current	$I_F$	5	10	25	mA
Continuous load current (AC peak/DC)	$I_O$	---	---	3.5	A
Operating temperature	$T_a$	-20	---	65	°C

## Engineering Data

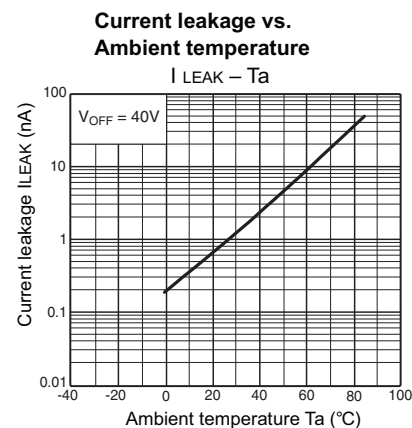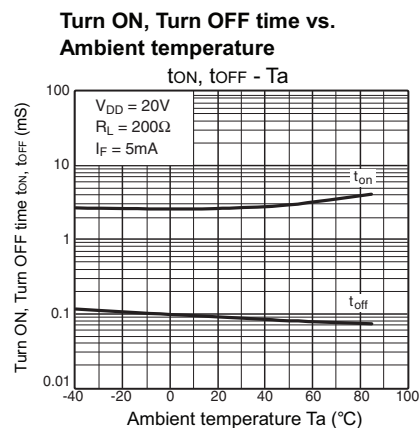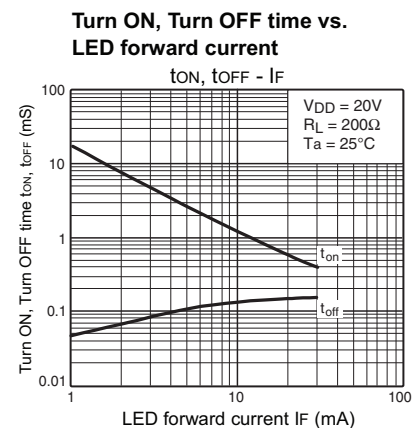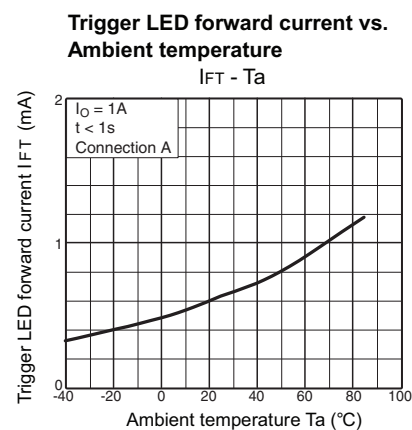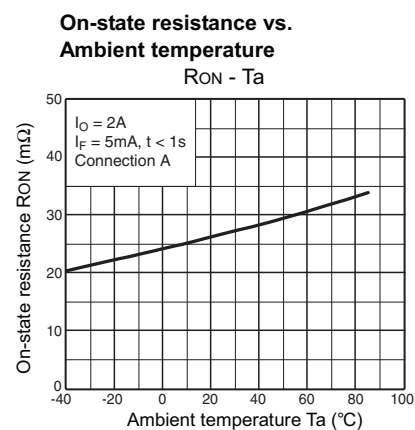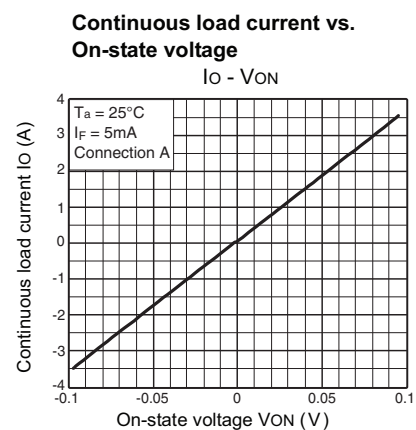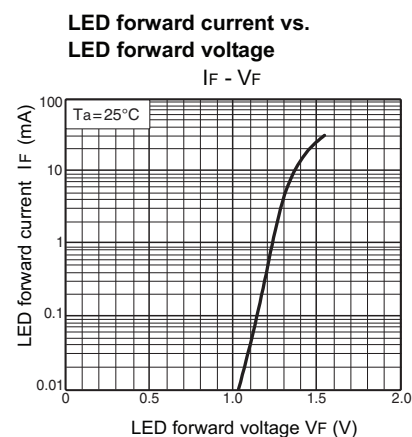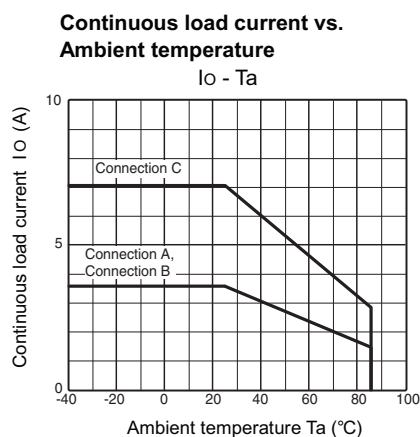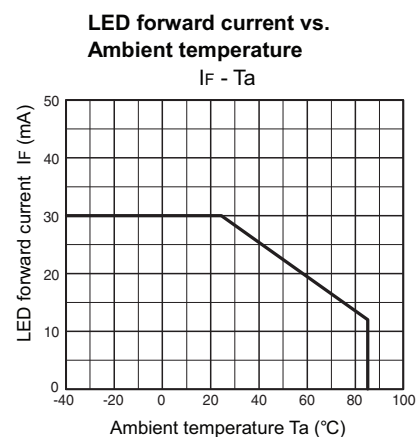

## Precautions

Be sure to read the precautions and information common to all G3VM MOS FET relays, contained in the Technical User's Guide, "MOSFET Relays, Technical Information" for correct use.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**OMRON**  
**OMRON ELECTRONIC  
COMPONENTS LLC**  
55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173  
**847-882-2288**

**OMRON ON-LINE**  
Global - <http://www.omron.com>  
USA - <http://www.components.omron.com>

Cat. No. K138-E-01

07/12

Specifications subject to change without notice

Printed in USA