

# MOS FET Relays

## G3VM-61PR

**Smallest Class in market, USOP Package**  
**MOS FET Relay with Low Output Capacitance and**  
**ON Resistance ( $C \times R = 20 \text{ pF} \cdot \Omega$ ) in a 60-V Load**  
**Voltage Model.**

- ON resistance of  $1 \Omega$  (typical) suppresses output signal attenuation.
- $C_{\text{OFF}} = 20 \text{ pF}$  (typical) and  $R_{\text{ON}} = 1 \Omega$  (typical).
- RoHS compliant.

### ■ Application Examples

- Semiconductor inspection tools
- Measurement devices and Data loggers
- Broadband systems



**NEW**

**Note:** The actual product is marked differently from the image shown here.


### ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per tape
SPST-NO	Surface-mounting terminals	60 VAC or VDC	G3VM-61PR	---
			G3VM-61PR(TR)	1,500


### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

#### G3VM-61PR



**Note:** The actual product is marked differently from the image shown here.


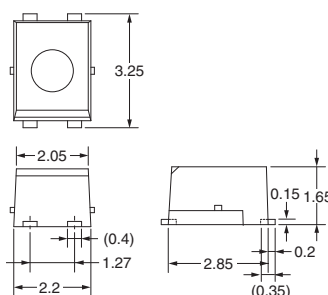


**Note:** A tolerance of  $\pm 0.2 \text{ mm}$  applies to all dimensions unless otherwise specified.

Weight: 0.03 g


### ■ Terminal Arrangement/Internal Connections (Top View)

#### G3VM-61PR

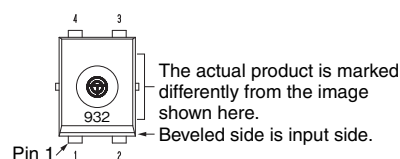

### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-61PR



## ■ Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	$I_F$	50	mA
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/ $^\circ\text{C}$
	LED reverse voltage	$V_R$	5	V
	Connection temperature	$T_j$	125	$^\circ\text{C}$
Output	Load voltage (AC peak/DC)	$V_{OFF}$	60	V
	Continuous load current	$I_O$	400	mA
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-4.0	mA/ $^\circ\text{C}$
	Connection temperature	$T_j$	125	$^\circ\text{C}$
Dielectric strength between input and output (See note 1.)		$V_{I-O}$	500	$V_{rms}$
Ambient operating temperature		$T_a$	-40 to +85	$^\circ\text{C}$
Storage temperature		$T_{stg}$	-40 to +125	$^\circ\text{C}$
Soldering temperature		---	260	$^\circ\text{C}$
				10 s

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V
	Reverse current	$I_R$	---	---	10	$\mu\text{A}$
	Capacity between terminals	$C_T$	---	15	---	pF
	Trigger LED forward current	$I_{FT}$	---	0.5	3	mA
Output	Maximum resistance with output ON	$R_{ON}$	---	1.0	1.5	$\Omega$
	Current leakage when the relay is open	$I_{LEAK}$	---	---	1	nA
	Capacity between terminals	$C_{OFF}$	---	20	30	pF
Capacity between I/O terminals		$C_{I-O}$	---	0.3	---	pF
Insulation resistance between I/O terminals		$R_{I-O}$	1,000	---	---	M $\Omega$
Turn-ON time		$t_{ON}$	---	0.3	0.5	ms
Turn-OFF time		$t_{OFF}$	---	0.3	0.5	ms

**Note:** 2. Turn-ON and Turn-OFF Times

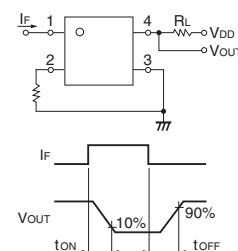


## ■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	---	---	48	V
Operating LED forward current	$I_F$	5	7.5	20	mA
Continuous load current (AC peak/DC)	$I_O$	---	---	400	mA
Operating temperature	$T_a$	-20	---	65	$^\circ\text{C}$

# ■ Engineering Data


**LED forward current vs.  
Ambient temperature**  
 $I_F - T_a$

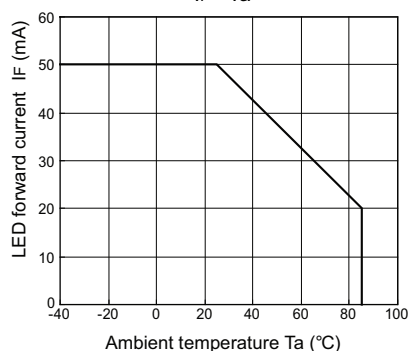


**Continuous load current vs.  
Ambient temperature**  
 $I_O - T_a$

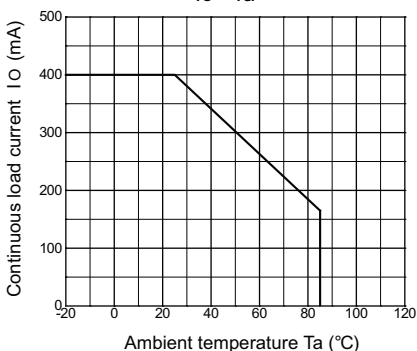


**LED forward current vs.  
LED forward voltage**  
 $I_F - V_F$

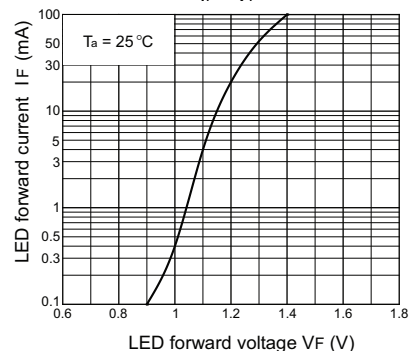


**Continuous load current vs.  
On-state voltage**  
 $I_O - V_{ON}$

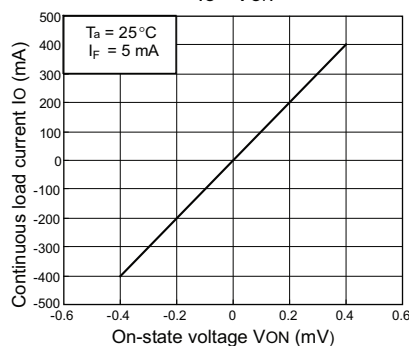


**On-state resistance vs.  
Ambient temperature**  
 $R_{ON} - T_a$

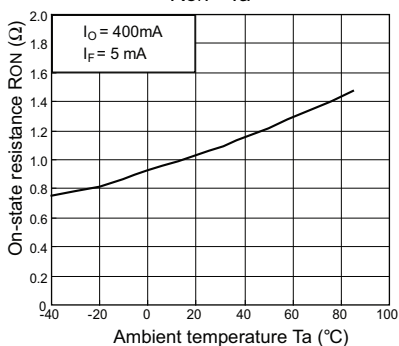


**Trigger LED forward current vs.  
Ambient temperature**  
 $I_{FT} - T_a$

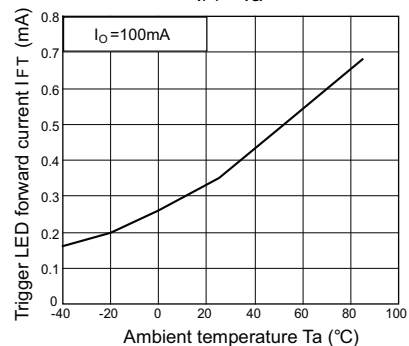


**Turn ON, Turn OFF time vs.  
LED forward current**  
 $t_{ON}, t_{OFF} - I_F$

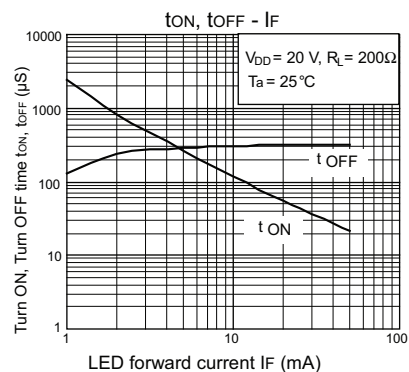


**Turn ON, Turn OFF time vs.  
Ambient temperature**  
 $t_{ON}, t_{OFF} - T_a$

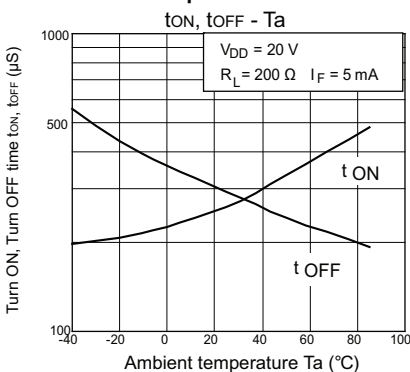

**Current leakage vs.  
Load voltage**  
 $I_{LEAK} - V_{OFF}$

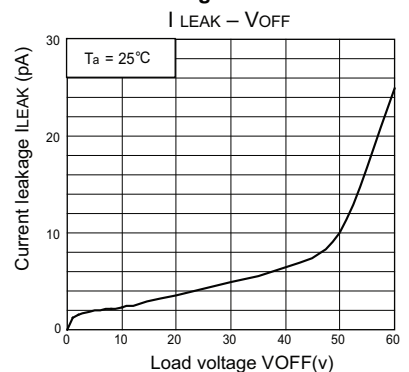

**Output terminal capacitance  
COFF/COFF(ov) vs. Load voltage**  
 $COFF - V_{OFF}$

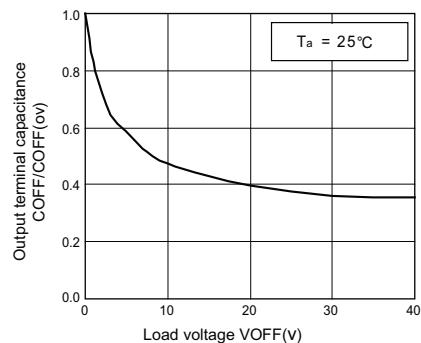

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. G3VM-61PR\_1

02/11

Specifications subject to change without notice

Printed in USA