


GA342A1XGF270JW31#

| "#" | indicates a | package | specification | code. |
|-----|-------------|---------|---------------|-------|
|-----|-------------|---------|---------------|-------|

Reflow OK Complies with RoHS Recommended

< List of part numbers with package codes > GA342A1XGF270JW31L

Shape

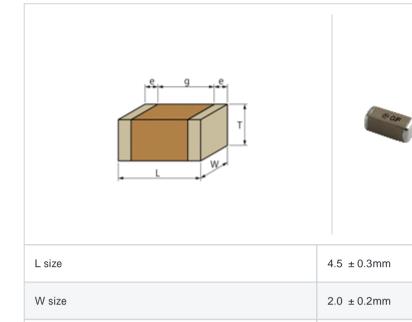

Notes

Y2 Class Certified Products, IEC60950 Devices only

References

| Packaging | Specifications | Minimum quantity |
|-----------|-----------------------|------------------|
| L | 180mm Embossed taping | 3000 |

| External terminal width e | 0.3mm min. |
|---------------------------------------|-------------|
| Distance between external terminals g | 2.5mm |
| Size code in inch(mm) | 1808 (4520) |

Specifications

T size

| Capacitance | 27pF ±5% |
|--|-------------------|
| Rated voltage | 250Vac(r.m.s.) |
| Temperature characteristics (complied standard) | SL(JIS) |
| Temperature coefficient | +350 to -1000ppm/ |
| Temperature range of temperature characteristics | 20 to 85 |
| Operating temperature range | -55 to 125 |

1 of 1

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

1.0 +0/-0.3mm



URL : http://www.murata.co.jp/

Last updated: 2013/11/16