


GA342QR7GD221KW01#

| " | # | 77 | indicates | а | package | specification | code. |
|---|---|-----------|-----------|---|---------|---------------|-------|
|---|---|-----------|-----------|---|---------|---------------|-------|

Reflow OF Complies with RoHS Recommended

< List of part numbers with package codes > GA342QR7GD221KW01L

Shape

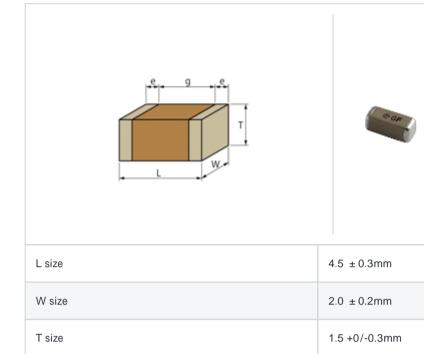

| Notes |
|--|
| Y3 Class Certified Products, IEC60950 Devices only |

References

| Packaging | Specifications | Minimum quantity | |
|-----------|-----------------------|------------------|--|
| L | 180mm Embossed taping | 2000 | |

Specifications

Size code in inch(mm)

External terminal width e

Distance between external terminals g

| Capacitance | 220pF ±10% |
|--|----------------|
| Rated voltage | 250Vac(r.m.s.) |
| Temperature characteristics (complied standard) | X7R(EIA) |
| Capacitance change rate | ± 15% |
| Temperature range of temperature characteristics | -55 to 125 |
| Operating temperature range | -55 to 125 |

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

0.3mm min.

1808 (4520)

2.5mm



URL : http://www.murata.co.jp/

Last updated: 2013/11/30