


GCM155R72A102KA37#

Complies with RoHS Recommended

< List of part numbers with package codes >

 $\mathsf{GCM155R72A102KA37D}\ ,\ \mathsf{GCM155R72A102KA37W}\ ,\ \mathsf{GCM155R72A102KA37J}$

Shape

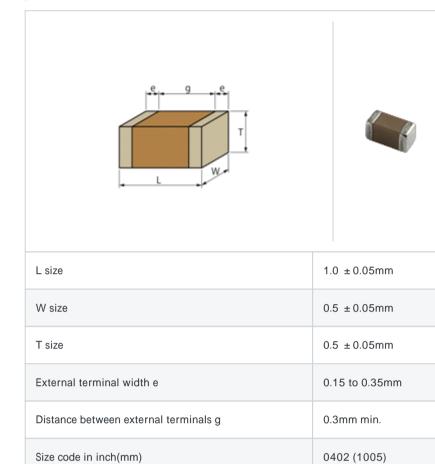

Specifications

Capacitance	1000pF ±10%
Rated voltage	100Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	± 15.0%
Temperature range of temperature characteristics	-55 to 125
Operating temperature range	-55 to 125

66	#	7 7	indicates	а	package	specification	code.
----	---	------------	-----------	---	---------	---------------	-------

References

Minimum quantity Packaging Specifications D 180mm Paper taping 10000 330mm Paper taping 50000 J 180mm Paper taping (W8P1*) W 20000 * Width : 8mm, Pocket pitch : 1mm

Mass (typ.)		
1 piece	1.6mg	
180mm Reel	118g	

1 of 2

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




URL : http://www.murata.co.jp/

Last updated: 2013/11/22




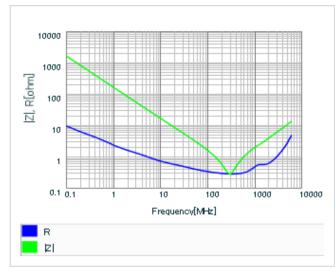


DC bias characteristics




Capacitance - temperature characteristics



S parameter (Smith chart S11)

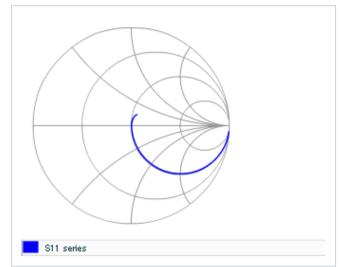

AC voltage characteristics



2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

