

GCM188R71H332KA37#


"#" indicates a package specification code.

References

Complies with RoHS Reflow OF Recommended

< List of part numbers with package codes > GCM188R71H332KA37D , GCM188R71H332KA37J

Shape

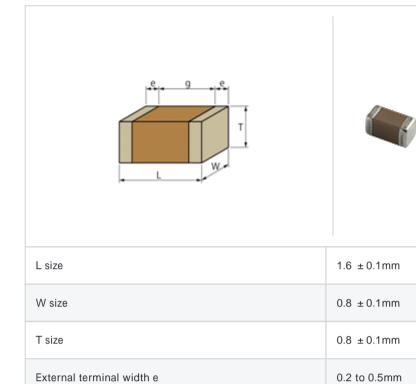

| Packaging | Specifications | Minimum quantity |
|-----------|--------------------|------------------|
| D | 180mm Paper taping | 4000 |
| J | 330mm Paper taping | 10000 |

| Mass (typ.) | | |
|-------------|-------|--|
| 1 piece | 6.3mg | |
| 180mm Reel | 144g | |

Specifications

Size code in inch(mm)

Distance between external terminals g

| Capacitance | 3300pF ±10% |
|--|-------------|
| Rated voltage | 50Vdc |
| Temperature characteristics (complied standard) | X7R(EIA) |
| Capacitance change rate | ± 15.0% |
| Temperature range of temperature characteristics | -55 to 125 |
| Operating temperature range | -55 to 125 |

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

0.5mm min.


0603 (1608)




URL : http://www.murata.co.jp/

Last updated: 2013/11/16







DC bias characteristics




Capacitance - temperature characteristics

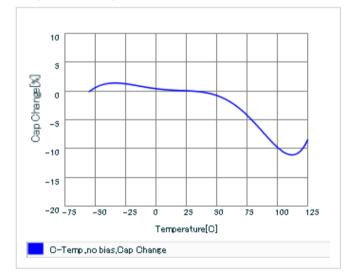

S parameter (Smith chart S11)



AC voltage characteristics



2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

muRata Murata Manufacturing Co., Ltd. Last updated: 2013/11/16