

GCM3195C1H153JA16#


"#" indicates a package specification code.

References

Complies with RoHS Recommended Reflow Oł

< List of part numbers with package codes > GCM3195C1H153JA16D , GCM3195C1H153JA16J

Shape

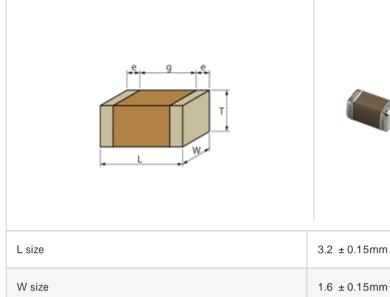

	Pac
E C	

 $0.85 \pm 0.1 mm$

0.3 to 0.8mm

1.5mm min.

1206 (3216)

Packaging	Specifications	Minimum quantity
D	180mm Paper taping	4000
J	330mm Paper taping	10000

Mass (typ.)		
1 piece	19mg	
180mm Reel	191g	

Specifications

External terminal width e

Size code in inch(mm)

Distance between external terminals g

T size

Capacitance	15000pF ±5%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	COG(EIA)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 125
Operating temperature range	-55 to 125

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




URL : http://www.murata.co.jp/


Last updated: 2013/11/16









AC voltage characteristics



S parameter (Smith chart S11)



Capacitance - temperature characteristics



2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the

approval sheet for product specifications before ordering.



Last updated: 2013/11/16