


# GQM2195C2E390GB12#

"#" indicates a package specification code.

#### Complies with RoHS Reflow OK Recommended

< List of part numbers with package codes > GQM2195C2E390GB12D

## Shape

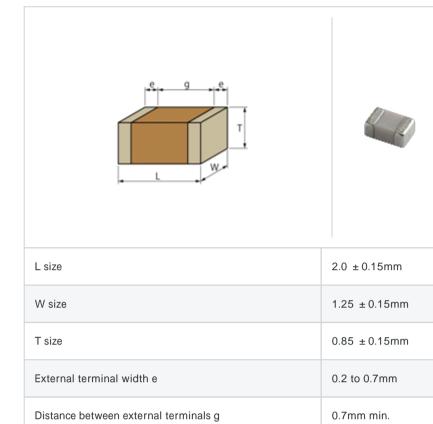

References					
	Packaging	Specifications	Minimum quantity		
	D	180mm Paper taping	4000		

Mass (typ.)	
1 piece	9.5mg
180mm Reel	152g

## Specifications

Size code in mm(inch)

Capacitance	39pF ±2%
Rated voltage	250Vdc
Temperature characteristics (complied standard)	COG(EIA)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 125
Operating temperature range	-55 to 125

#### 1 of 2

# 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2012 (0805)




URL : http://www.murata.co.jp/


Last updated: 2013/10/31

## Chart of characteristic data (The charts below may show another part number which shares its characteristics.)


Frequency characteristics (ESR, Impedance)

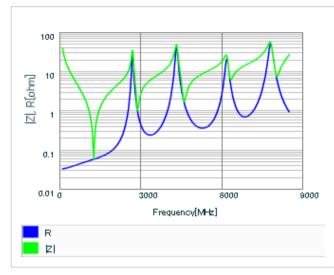


#### AC voltage characteristics

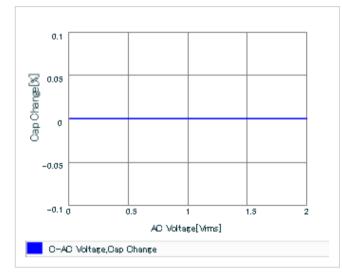


#### Calorific property by ripple current

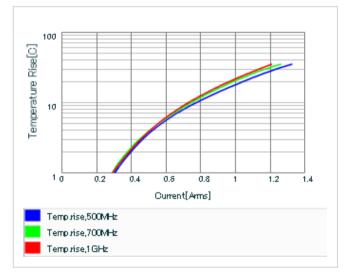

# S parameter (Smith chart S11)

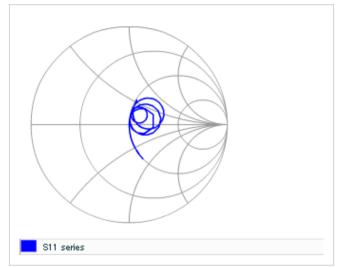

Capacitance - temperature characteristics

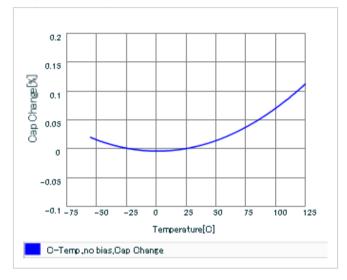

2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

