


# GRM0335C1E390JD01#

Ultra-compact To be discontinued Reflow OF ∪omp∥es with RoHS

< List of part numbers with package codes >

 $\mathsf{GRM0335C1E390JD01D}\ ,\ \mathsf{GRM0335C1E390JD01W}\ ,\ \mathsf{GRM0335C1E390JD01J}$ 

## Shape

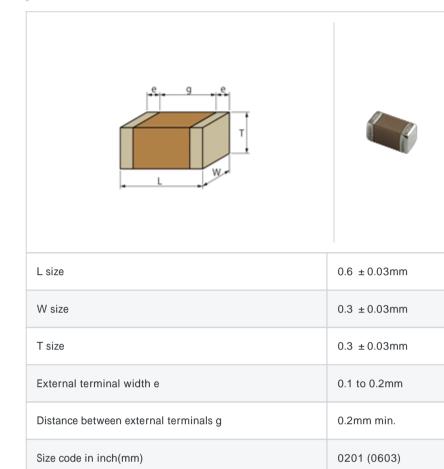

D	180mm Paper taping		15000
J	330mm Paper taping		50000
W	180mm Paper taping (W8P1*) * Width : 8mm, Pocket pitch : 1mm		30000
	Mass (typ.)		
1 piece		0.33mg	

118g

Specifications

"# " indicates a package specification code.

Please use replacements or Recommended.

Notes

References

180mm Reel

Packaging

## Specifications

Capacitance	39pF ±5%
Rated voltage	25Vdc
Temperature characteristics (complied standard)	COG(EIA)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 125
Operating temperature range	-55 to 125

#### 1 of 2

## 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




URL : http://www.murata.co.jp/

Last updated: 2013/11/30


Minimum quantity

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)







### AC voltage characteristics

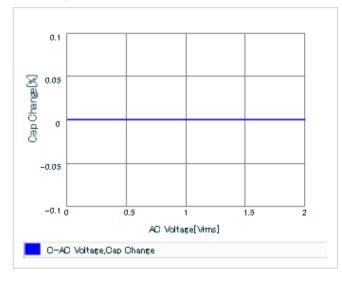

S parameter (Smith chart S11)



Capacitance - temperature characteristics



2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the

approval sheet for product specifications before ordering.



Last updated: 2013/11/30