


GRM0336S1E1R0CD01#

Ultra-compact To be discontinued Reflow OF Complies with RoHS

< List of part numbers with package codes >

 ${\tt GRM0336S1E1R0CD01D}\ ,\ {\tt GRM0336S1E1R0CD01W}\ ,\ {\tt GRM0336S1E1R0CD01J}$

Shape

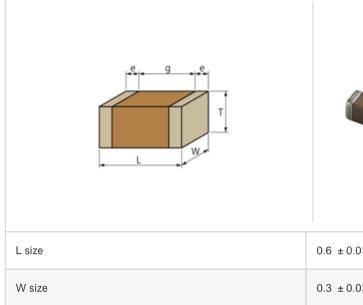

 $0.3 \pm$

0.1 to 0.2mm

0.2mm min.

0201 (0603)

	W	180mm Paper taping (W8P1*) * Width : 8mm, Pocket pitch : 1mm		30000
: 0.03mm	Mass (typ.)			
: 0.03mm	1 piece		0.33mg	
: 0.03mm	180mm Reel		118g	

180mm Paper taping

330mm Paper taping

Specifications

"#" indicates a package specification code.

References

Packaging

D

J

Specifications

External terminal width e

Size code in inch(mm)

Distance between external terminals g

T size

Capacitance	1.0pF ± 0.25pF	
Rated voltage	25Vdc	
Temperature characteristics (complied standard)	S2H(EIA)	
Temperature coefficient	-330 ± 60ppm/	
Temperature range of temperature characteristics	25 to 85	
Operating temperature range	-55 to 125	

1

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



URL : http://www.murata.co.jp/

Last updated: 2013/11/13

Minimum quantity

15000

50000