

# GRM155R61A222KA01#

"#" indicates a package specification code.


References

#### Available omplies with RoHS

< List of part numbers with package codes >

GRM155R61A222KA01D , GRM155R61A222KA01W , GRM155R61A222KA01J

### Shape

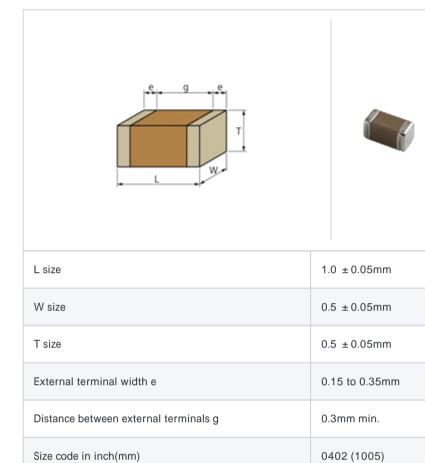

#### Packaging Specifications D 180mm Paper taping 330mm Paper taning т

J	330mm Paper taping	50000
W	180mm Paper taping (W8P1*) * Width : 8mm, Pocket pitch : 1mm	20000

Minimum quantity

10000

Mass (typ.)	
1 piece	1.6mg
180mm Reel	118g

## Specifications

Capacitance	2200pF ±10%
Rated voltage	10Vdc
Temperature characteristics (complied standard)	X5R(EIA)
Capacitance change rate	± 15.0%
Temperature range of temperature characteristics	-55 to 85
Operating temperature range	-55 to 85

# Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



URL : http://www.murata.co.jp/

Last updated: 2013/11/18