

# GRM155R71H562KA88#


"#" indicates a package specification code.

#### Reflow OF Available Complies with RoHS

< List of part numbers with package codes >

 $\mathsf{GRM155R71H562KA88D}\ ,\ \mathsf{GRM155R71H562KA88W}\ ,\ \mathsf{GRM155R71H562KA88J}$ 

### Shape

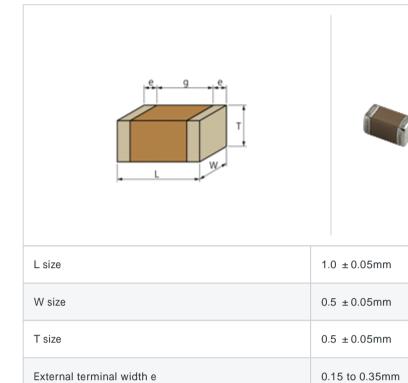

	References		
	Packaging	Specifications	
	D	180mm Paper taping	
	J	330mm Paper taping	
	W	180mm Paper taping (W8P1*) * Width : 8mm, Pocket pitch : 1mm	

Mass (typ.)		
1 piece	1.6mg	
180mm Reel	118g	

### Specifications

Size code in inch(mm)

Distance between external terminals g

Capacitance	5600pF ±10%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	± 15.0%
Temperature range of temperature characteristics	-55 to 125
Operating temperature range	-55 to 125

## Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

0.3mm min.

0402 (1005)



URL : http://www.murata.co.jp/

Last updated: 2013/11/18

Minimum quantity

10000

50000

20000