


GRM32EF50J107ZE20#

"#" indicates a package specification code.

Reflow OF Available Complies with RoHS

< List of part numbers with package codes > GRM32EF50J107ZE20L , GRM32EF50J107ZE20K

Shape

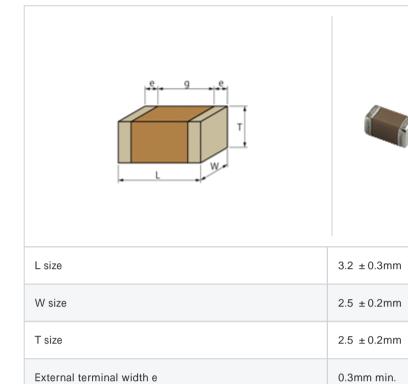

References	

Packaging	Specifications	Minimum quantity
L	180mm Embossed taping	1000
K	330mm Embossed taping	4000

Mass (typ.)				
1 piece	110mg			
180mm Reel	168g			

Specifications

Size code in inch(mm)

Distance between external terminals g

Capacitance	100µF +80/-20%
Rated voltage	6.3Vdc
Temperature characteristics (complied standard)	Y5V(EIA)
Capacitance change rate	+22.0/-82.0%
Temperature range of temperature characteristics	-30 to 85
Operating temperature range	-30 to 85

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

1.0mm min.

1210 (3225)



URL : http://www.murata.co.jp/

Last updated: 2013/11/30