

GRM32NF51E106ZA01#

"#" indicates a package specification code.


References

Reflow Oh Available Complies with RoHS

< List of part numbers with package codes >

GRM32NF51E106ZA01L , GRM32NF51E106ZA01K

Shape

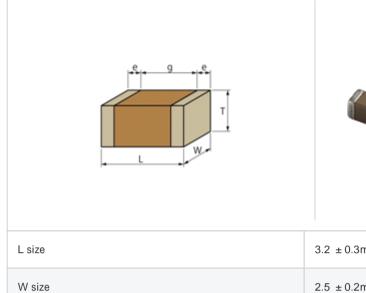

1.0mm min.

1210 (3225)

	1 piece	
3.2 ±0.3mm	180mm Reel	
2.5 ± 0.2mm		
1.35 ±0.15mm		
0.3mm min.		

Packaging	Specifications	Minimum quantity
L	180mm Embossed taping	2000
К	330mm Embossed taping	8000

Mass (typ.)			
1 piece	57mg		
180mm Reel	174g		

Specifications

External terminal width e

Size code in inch(mm)

Distance between external terminals g

T size

Capacitance	10µF +80/-20%
Rated voltage	25Vdc
Temperature characteristics (complied standard)	Y5V(EIA)
Capacitance change rate	+22.0/-82.0%
Temperature range of temperature characteristics	-30 to 85
Operating temperature range	-30 to 85

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



URL : http://www.murata.co.jp/

Last updated: 2013/11/30