
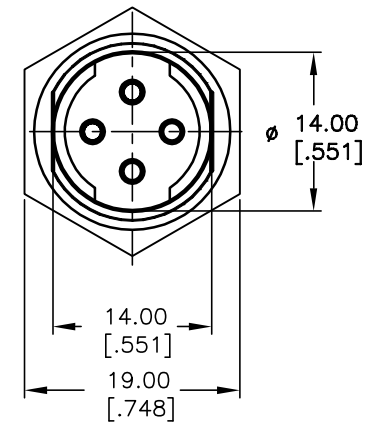
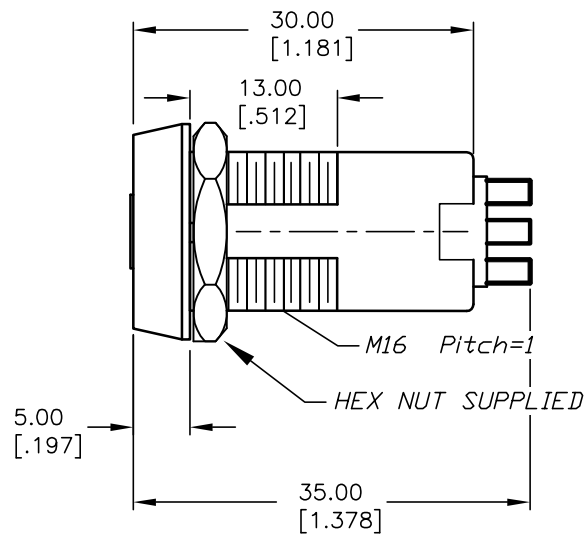
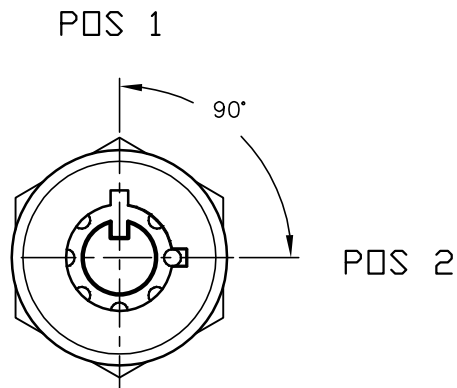


CIRCUIT: SPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |       |
|-----------------|-------|
| POS 1           | POS 2 |
| ↑               | →     |
| ON              | ON    |

## LEGEND

■ =INDICATES KEY PULL  
X =INDICATES NO KEY PULL

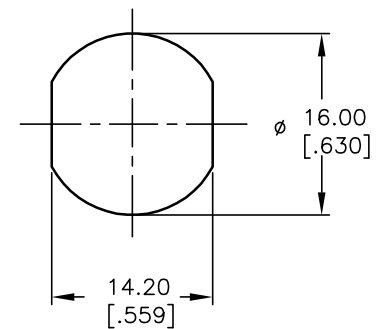

RECOMMENDED PANEL CUTOUT

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 3A @125VAC, 1.5A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS min.
8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST  
CYLINDER: ZINC ALLOY W/CHROME PLATING  
TERMINAL AND CONTACTS: SILVER PLATED  
KEYS (2) KEY CODE 10002: TUBULAR  
ZINC ALLOY, CHROME PLATING W/PLASTIC COVER

**E-SWITCH®**

TITLE

K□104B-10002

SCALE

1.5:1

DATE

2/4/04

DR

AR

DWG

K300103

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

|      |         |                         |        |      |
|------|---------|-------------------------|--------|------|
| A    | 13572   | RELEASED FOR PRODUCTION | 2/4/04 | AR   |
| REV. | ECN No. | DESCRIPTION             | DATE   | CHKD |