

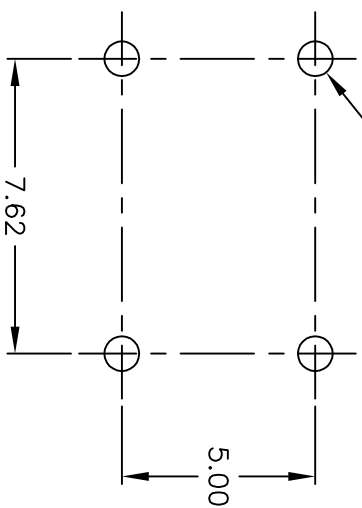



Ø0.90 (4 PL)

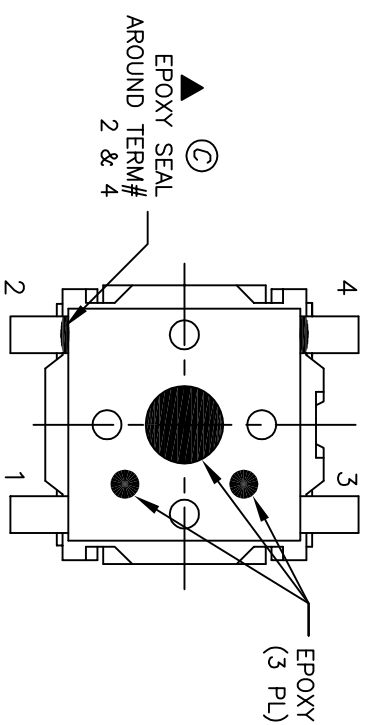

RECOMMENDED P.C.B. LAYOUT

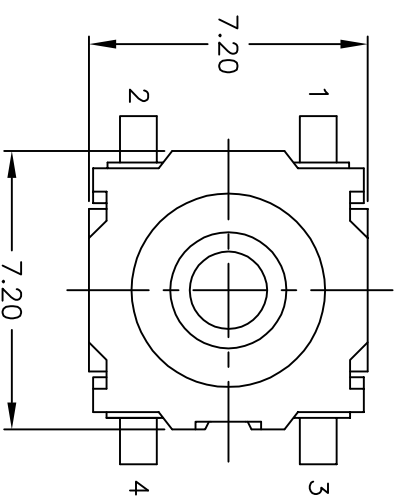

BOTTOM VIEW





CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
 3. TERM. NOS. FOR REF. ONLY
 4. OPERATING FORCE: $130 \pm 40\text{gf}$
 5. TRAVEL TO MAKE: $0.3\text{mm} + 0.4/-0.0$
 6. RATING: 30mA , $@12\text{V DC}$
 7. CONTACT RESISTANCE: 50 MILLI-OHMS (initial)
 8. DIELECTRIC STRENGTH: 300V RMS min at sea level.
 9. ELECTRICAL LIFE CYCLE: $400,000\text{ make \& break cycles at full load.}$
- ② 10. INSULATION RESISTANCE: 100Mega-Ohms min
(Between Adjacent contacts).
11. CONTACT BOUNCE: 10ms
 12. OPERATING TEMP. -40°C to 80°C
 13. ▲ DESIGNATE MAJOR FEATURE:
 14. 2002/95/EC (ROHS) COMPLIANT

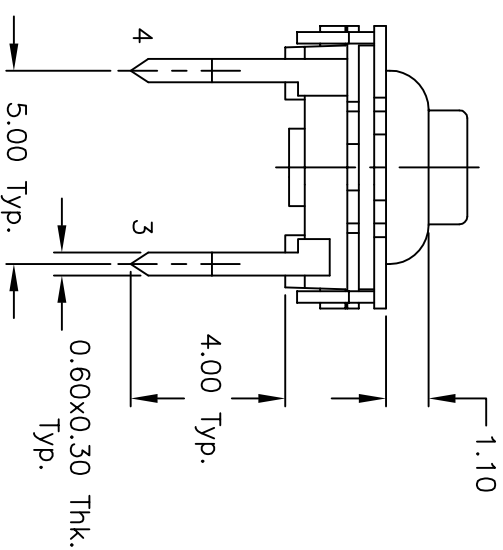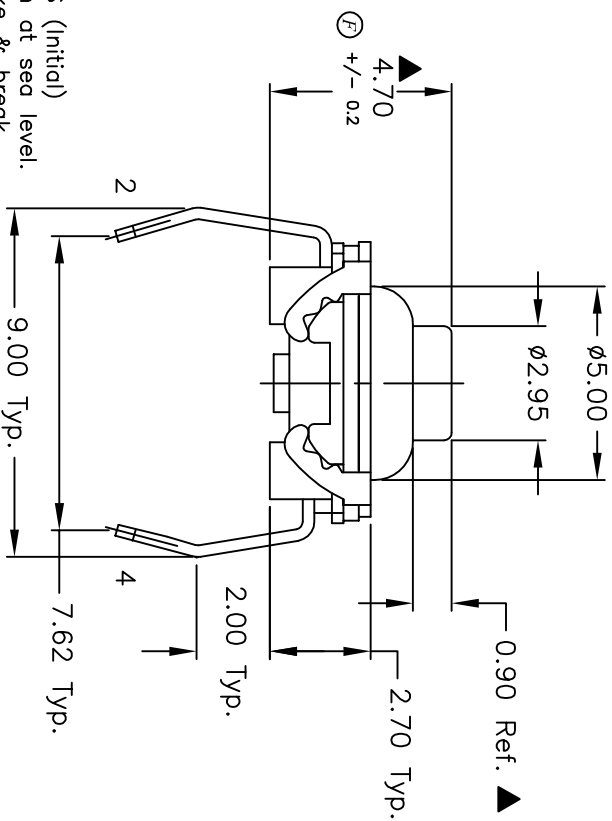

F	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR
E	15471	REV. BOTTOM VIEW	10/28/05	PH
D	12191	REVISED NOTE 9, ADD NOTES	8/22/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

 E-SWITCH				
TITLE				
GS 4.70 F130 QP				
SCALE	DATE	DR	DWG	REV
5:1	7/31/08	BLR	L400000	F