
Spec Sheet

Axial Leaded Inductors

LAP02TA181K

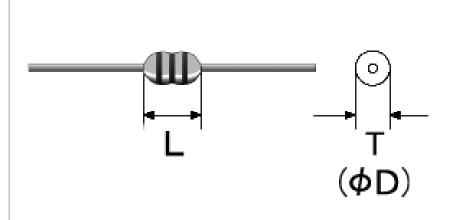

Features

- Item Summary
- 180 μ H(±10%), 37mA, 40, Leaded
- Lifecycle Stage
- Phaseout
- Standard packaging quantity (minimum)
 Taping 2000pcs

Products characteristics table

| External Dimensions (mm) LxD | 3.4(max)×2.3(max)mm |
|--------------------------------|---------------------|
| Inductance | 180 µ H(±10%) |
| Inductance Measuring Frequency | 0.796MHz |
| DC Resistance (max) | 18Ω |
| Q (min) | 40min |
| Temperature Range | -25°C to 105°C |
| Self-resonant Frequency (min) | 5.5MHz |
| RoHS Compliance | Yes |
| Halogen Free | Yes |
| Soldering Method | Wave |

External Dimensions

| L | 3.4mm max |
|---|-----------|
| D | 2.3mm max |

The data is reference only. Electrical characteristics vary depending on environment or measurement condition. TAIYO YUDEN reserves the right to make change to the Date at any time without notice. Before making final selection, please check product specification.

TAIYO YUDEN