

# LLA315R71C224MA14#

“ # ” indicates a package specification code.

Recommended


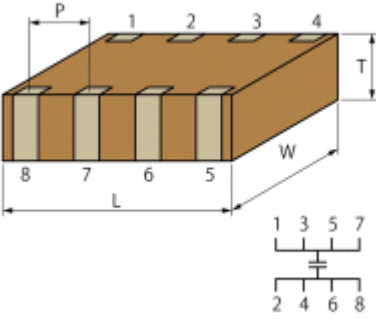
Reflow OK

Complies with RoHS

Low ESL

< List of part numbers with package codes >  
LLA315R71C224MA14L , LLA315R71C224MA14K

## Shape



L size	3.2 ± 0.15mm
W size	1.6 ± 0.15mm
T size	0.5 +0.05/-0.1mm
Distance between external terminals P	0.8 ± 0.1mm
Size code in mm(inch)	3216 (1206)

## References

Packaging	Specifications	Minimum quantity
L	180mm Embossed taping	4000
K	330mm Embossed taping	10000

Mass (typ.)	
1 piece	15mg
180mm Reel	171g

## Specifications

Capacitance	0.22μF ± 20%
Rated voltage	16Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	± 15.0%
Temperature range of temperature characteristics	-55 to 125
Operating temperature range	-55 to 125

### Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ’ s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.